

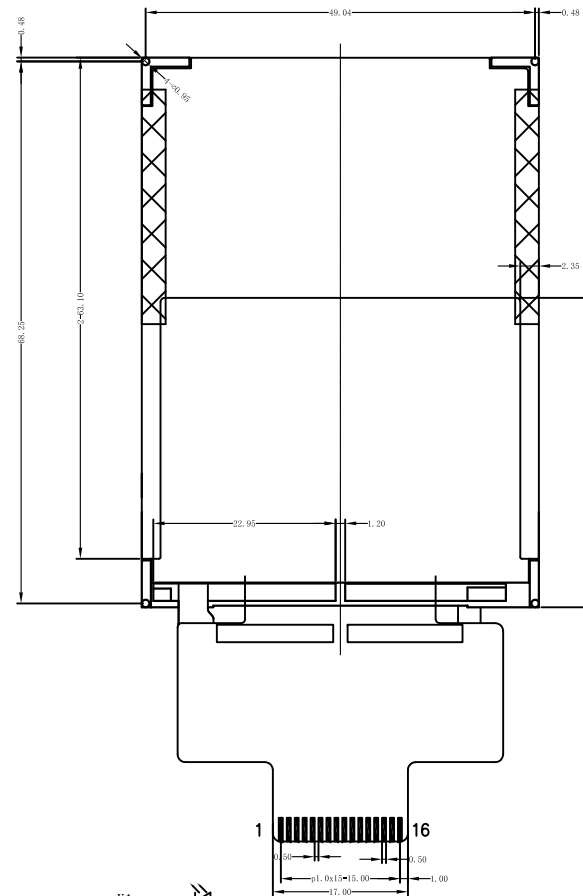
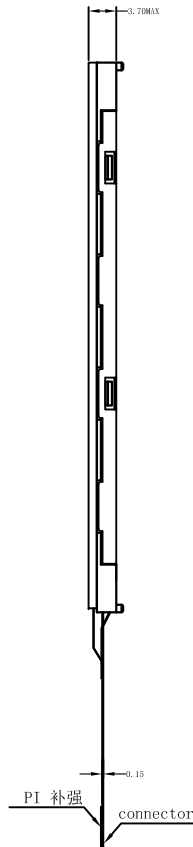


| REV: | DESCRIPTION | BY | DATE |
|------|-------------|-------|------|
| V1.0 | NEW | SD-03 | |
| | | | |

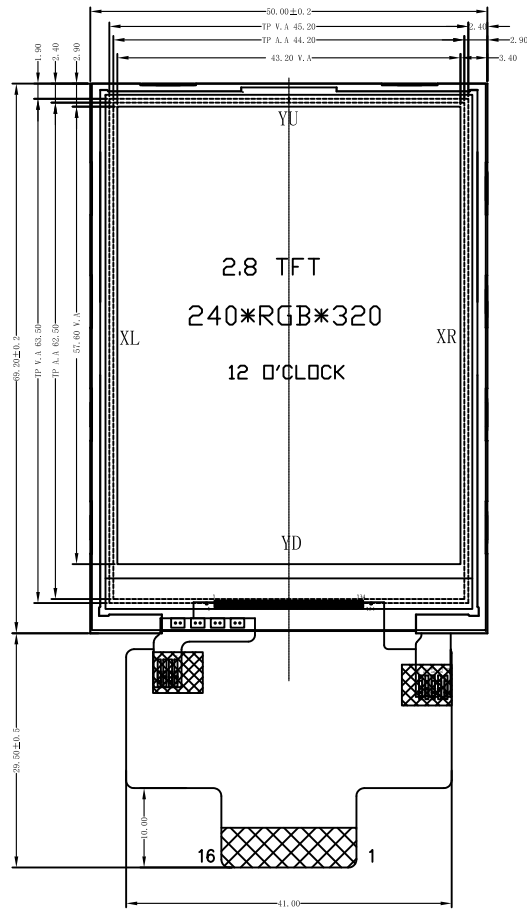

IF=4*15mA


LED CIRCUIT DIAGRAM

- 1.BackLight:4 CHIP LEDS,parallel connection
- 2.BackLightLuminance:>3500cd/m2
- 3.Back Light Driver Voltage:3.0±0.2V
- 4.Back Light Circuit:60mA

| | |
|----|-------|
| 1 | GND |
| 2 | RS |
| 3 | CS |
| 4 | IOVCC |
| 5 | VCC |
| 6 | LEDA |
| 7 | LEDK |
| 8 | RESET |
| 9 | SCK |
| 10 | SDA |
| 11 | GND |
| 12 | XR |
| 13 | YD |
| 14 | XL |
| 15 | YU |
| 16 | GND |

NOTES :

- 1.Display Type : TFT/262K colors
- 2.Viewing Direction : 12:00
- 3.Driver IC: ILI9341
- 4.Logic Voltage :3.3V
- 5.Interface:4-SPI
- 6.Operating Temperature : -20°~ +70°C
- 7.Storage Temperature : -30°~ +80°C
- 8.Requirements on Environmental Protection :ROHS

| | | | | |
|---|------------|-----------------------------|--------------|-----------|
|  SINDA DISPLAY TECHNOLOGY CO., LTD. | | | | |
| SHEET: 1 of 1 | | MODEL NUMBER : SDT02803-A16 | VERSION: 1.0 | UNITS: MM |
| APPROVALS | DATE | GENERAL TOL:± 0.2 | | |
| DWN SD-03 | 2016-11-21 | DO NOT SCALE THIS DRAWING. | | |
| CHK | | www.sindadisplay.com | | |
| APP SD-11 | 2016-11-21 | | | |
| | | SCALE: 1:1 | | |