
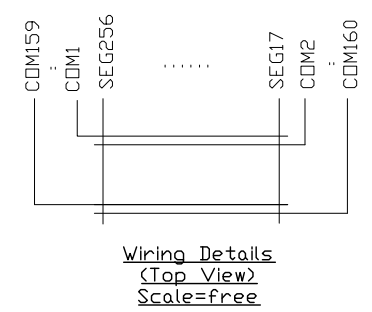




REV:	DESCRIPTION	BY	DATE
V1.0	New issue	SD-03	2018-03-26

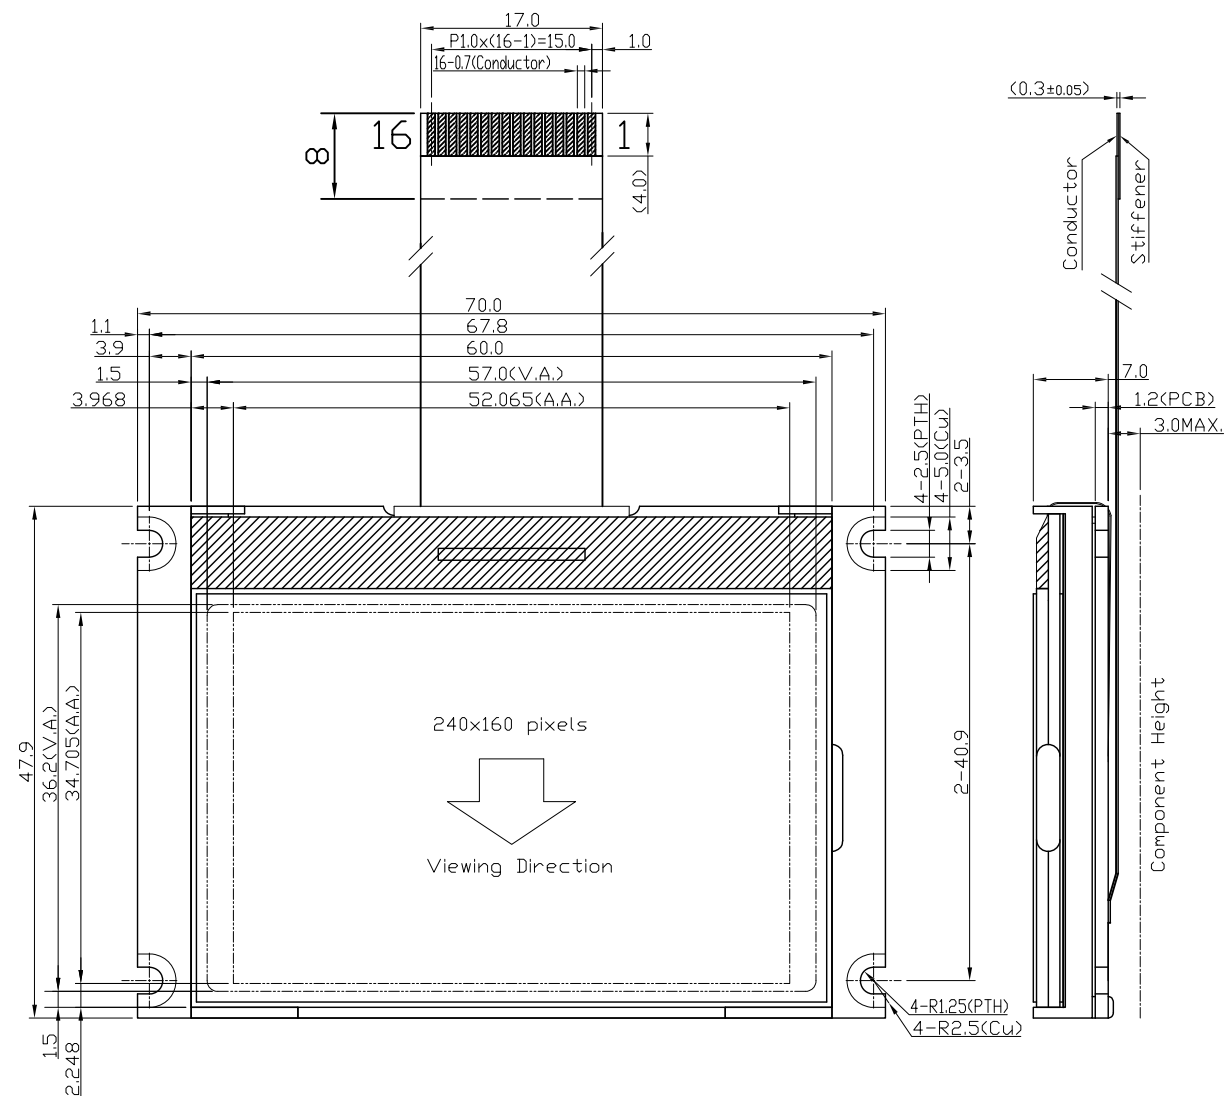

默认4-SPI接口

Terminal	
No.	Pin Na
1	VSS
2	VDD
3	DB7
4	DB6
5	DB5
6	DB4
7	DB3 (SDA)
8	DB2
9	DB1
10	DB0 (SCK)
11	/RD
12	/WR
13	CD
14	/RST
15	/CS
16	BLA

- Note:
1. Display Type : STN-Blue, Negative, Transmissive
  2. Viewing Direction: 12H
  3. Duty : 1/160, Bias : 1/12
  4. Backlight Color : White
  5. Operating Voltage : 3.3V
  6. Backlight Supply : 3.3V TYP.
  7. Operating Temperature : -20°C~70°C
  8. Storage Temperature : -30°C~80°C
  9. Driver/Controller IC : UC1611

 <b>SINDA DISPLAY TECHNOLOGY CO., LTD.</b>		<b>SDGG240160-11</b>	
SHEET: 1 of 1		MODEL NUMBER :	VERSION: 1.0
APPROVALS	DATE	UNITS: MM	
DWN	SD-03	GENERAL TOL: ± 0.2	
CHK	SD-11	DO NOT SCALE THIS DRAWING.	
APP	SD-11	SCALE: 1:1	
		<a href="http://www.sindadisplay.com">www.sindadisplay.com</a>	