



REV:	DESCRIPTION	BY	DATE
V1.0	NEW	SD-03	

PIN	SYMBLE
1	VBL-
2	VBL-
3	VBL+
4	VBL+
5	NC
6	NC
7	NC
8	RESET
9	CS
10	SCL
11	SDL
12	B0
13	B1
14	B2
15	B3
16	B4
17	B5
18	B6
19	B7
20	G0
21	G1
22	G2
23	G3
24	G4
25	G5
26	G6
27	G7
28	R0
29	R1
30	R2
31	R3
32	R4
33	R5
34	R6
35	R7

36	HSYNC
37	VSYNC
38	DOTCLK
39	NC
40	NC
41	VCC
42	VCC
43	NC
44	NC
45	NC
46	NC
47	NC
48	NC (XR)
49	NC (YD)
50	NC (XL)
51	NC (YU)
52	DEN
53	GND
54	GND

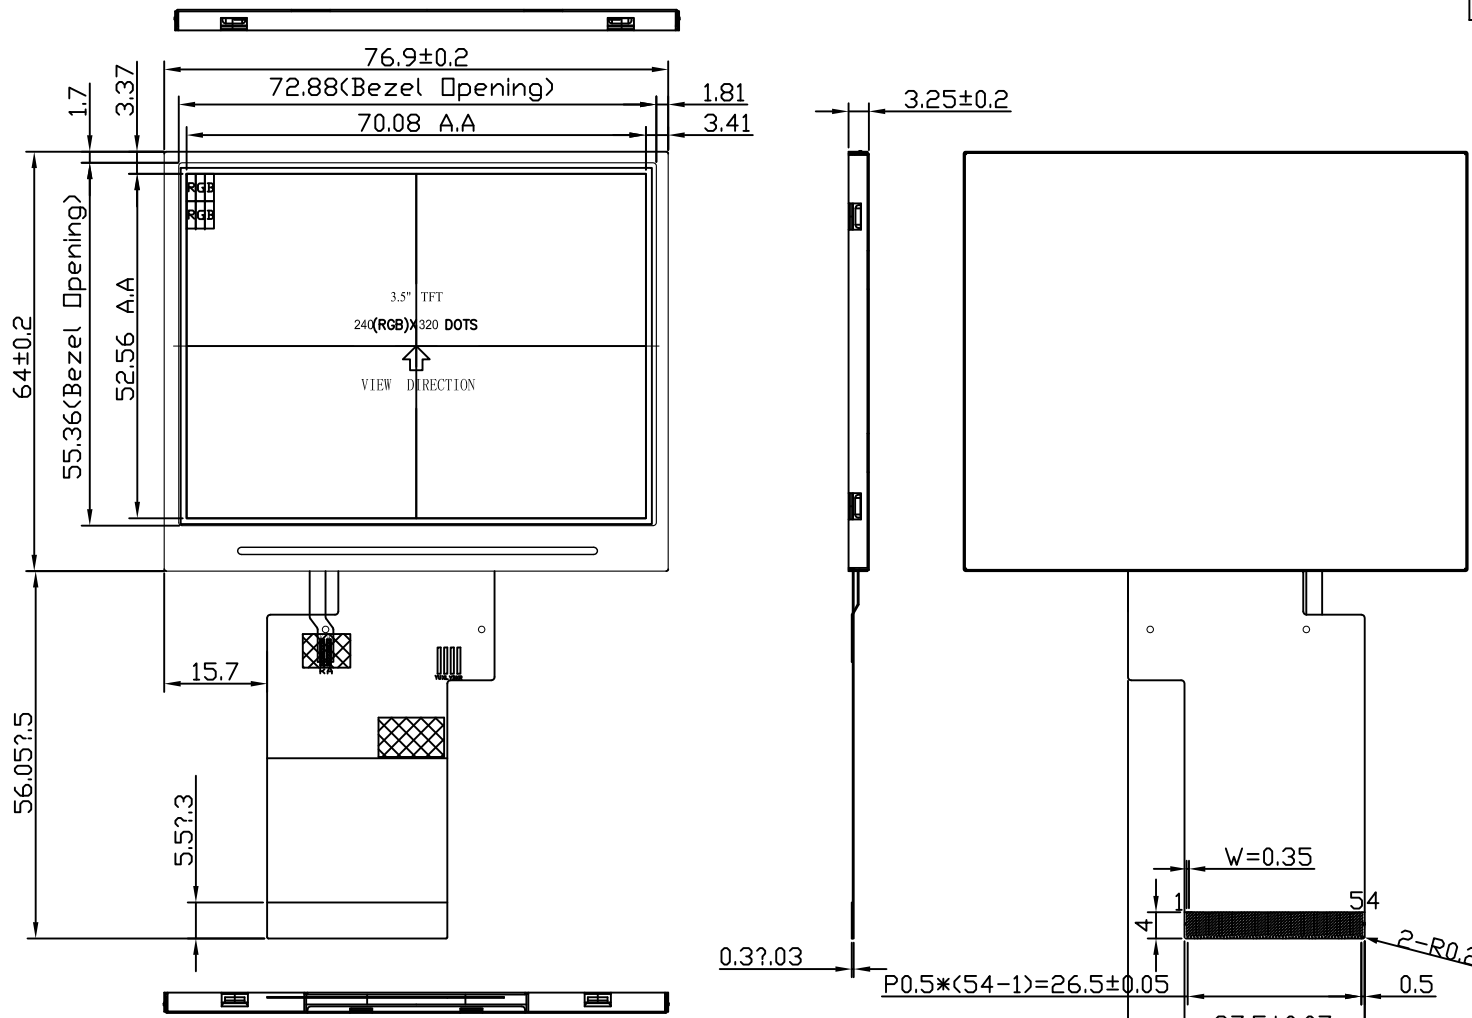

NOTES :

1. Display Type : 3.5" TFT
2. Viewing Direction : 6:00
3. Driver IC: HX8238D
4. Logic Voltage : 3.3V
5. Operating Temperature : -20°~ +70°C
6. Storage Temperature : -30°~ +80°C
7. Requirements on Environmental Protection : ROHS

		SINDA DISPLAY TECHNOLOGY CO., LTD.	
SHEET: 1 of 1		MODEL NUMBER : SDT03501N-54	VERSION: 1.0
APPROVALS	DATE	GENERAL TOL: ± 0.2	
DWN	SD-03 2014-07-06	DO NOT SCALE THIS DRAWING.	
CHK		SCALE: 1:1	
APP	SD-11 2014-07-06	www.sindadisplay.com	