
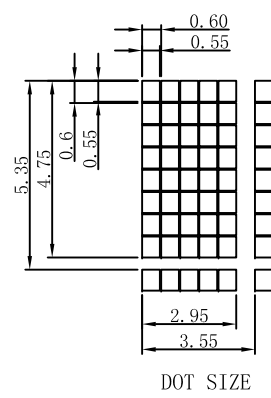
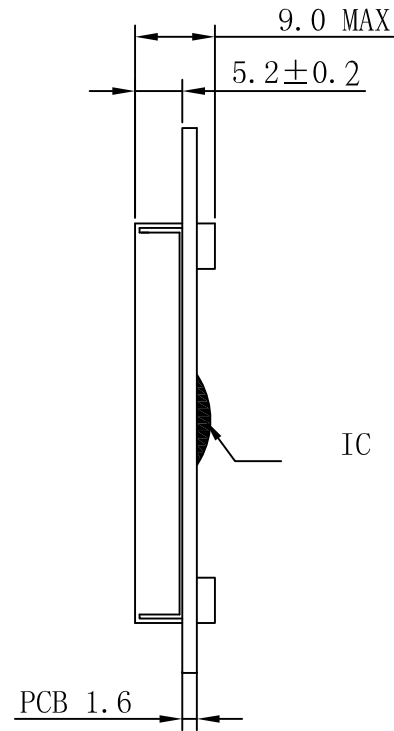


REV:	DESCRIPTION	BY	DATE
V1.0	New issue	SD-03	2018-06-26

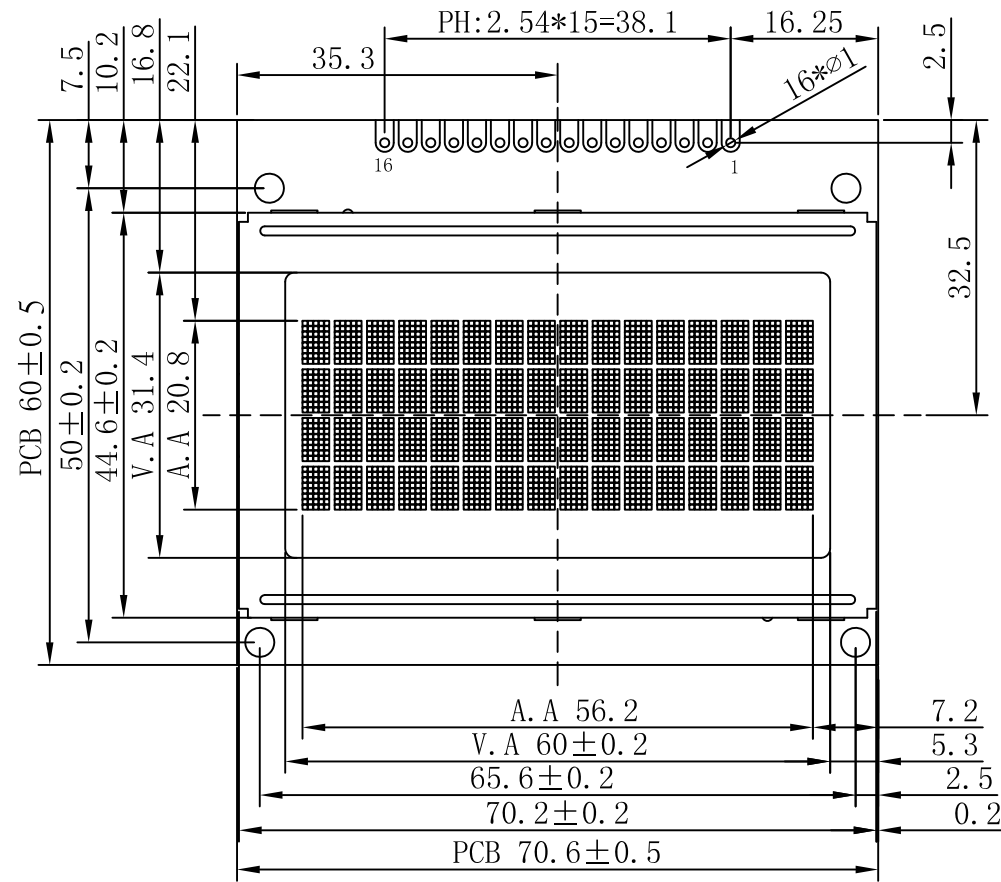


INTERFACE

1	VSS
2	VDD
3	NC
4	RS
5	R/W
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	LED_A
16	LED_K

SPECIFICATION:

- 1). STN(Y-G) /POSITIVE/TRANSFLECTIVE
- 2). DUTY:1/16. BIAS:1/5. VOP=4.8V
- 3). VIEWING ANGLE: 6 O' CLOCK
- 4). OPERATING TEMPERATURE: -20~70°C
STORAGE TEMPERATURE: -30~80°C
- 5). BACKLIGHT: 5PCS SIDE Y-G LED V=4.2v I=50mA
- 6). DRIVE IC: ST7066U-0B+ST7065
- 7). DRIVE POWER: VDD=5.0V



		SINDA DISPLAY TECHNOLOGY CO., LTD.	
SHEET: 1 of 1		MODEL NUMBER : SDCB1604-05	VERSION: 1.0 GENERAL TOL:± 0.2 DO NOT SCALE THIS DRAWING.
APPROVALS	DATE	UNITS: MM	
DWN	SD-03	2018-06-26	
CHK			
APP	SD-11	2018-06-26	
www.sindadisplay.com		SCALE: 1:1	