
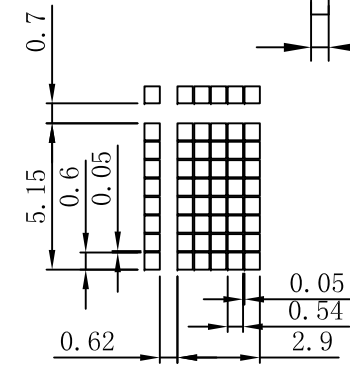
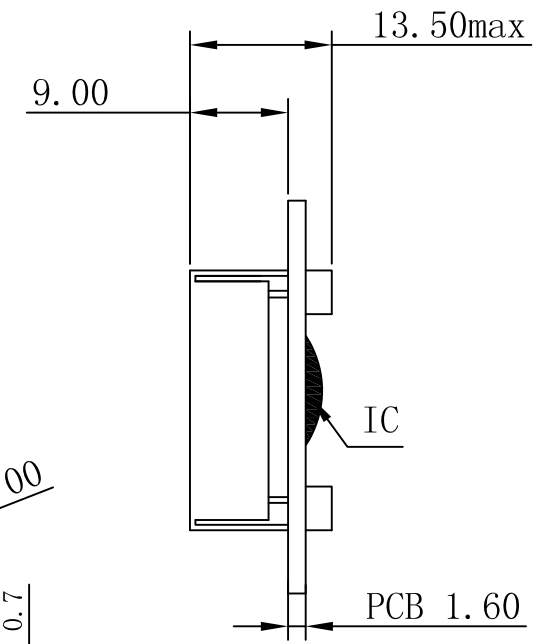


| REV: | DESCRIPTION | BY | DATE |
|------|-------------|----|------------|
| V1.0 | New issue | XP | 2013-09-16 |
| | | | |
| | | | |

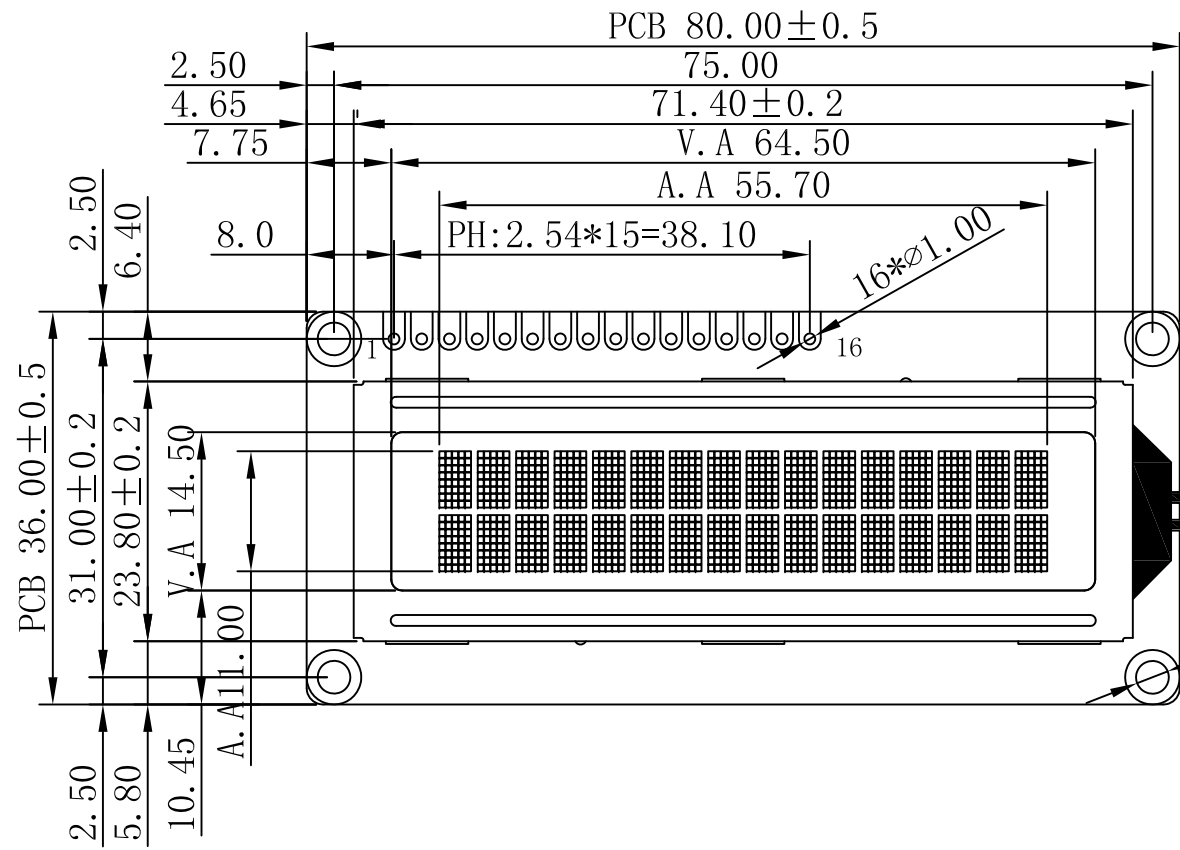

| NO | Symbol |
|----|--------|
| 1 | VSS |
| 2 | VDD |
| 3 | V0 |
| 4 | RS |
| 5 | RW |
| 6 | E |
| 7 | DB0 |
| 8 | DB1 |
| 9 | DB2 |
| 10 | DB3 |
| 11 | DB4 |
| 12 | DB5 |
| 13 | DB6 |
| 14 | DB7 |
| 15 | A |
| 16 | K |

NOTES :

- | | |
|---|---|
| 1. LCD TYPE: | STN Y-G, Positive Transmissive |
| 2. OPERATING VOLTAGE: | VDD=5.0V, Vop=4.70V |
| 3. VIEWING DIRECTION: | 6 O'CLOCK |
| 4. DRIVE METHOD: | 1/16 Duty, 1/5 Bias |
| 5. OPERATING TEMP: | -20°C TO +70°C |
| 6. STORAGE TEMP: | -30°C TO +80°C |
| 7. CONNECTOR TAPE: | Zebra |
| 8. DRIVER IC: | AIP31066 or Equivalent |
| 9. BACKLIGHT: | Yellow-Green, 1 pcs LED VF=3.1±0.2, IF=15mA |
| 10. ALL sub-parts and materials of the parts, must comply with the RoHS instructions of EU. | |

| | |
|---|------------|
| SINDA DISPLAY TECHNOLOGY CO., LTD. | |
| SHEET: 1 of 1 | |
| APPROVALS | DATE |
| DWN XP | 2013-09-16 |
| CHK | |
| APP CJ | 2013-09-16 |
| MODEL NUMBER : SDCB1602-01 | |
| VERSION: 1.0 | UNITS: MM |
| GENERAL TOL: ± 0.2 | |
| DO NOT SCALE THIS DRAWING. | |
| www.sindadisplay.com | |
| SCALE: 1:1 | |