
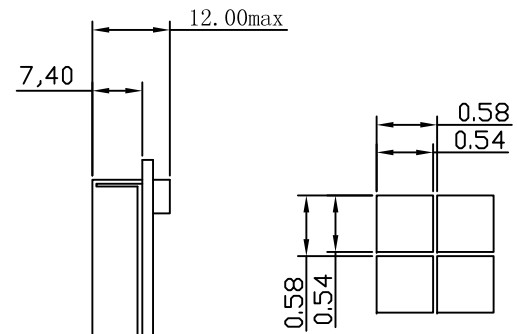


REV:	DESCRIPTION	BY	DATE
V1.0	New issue	Mike	2013-08-04

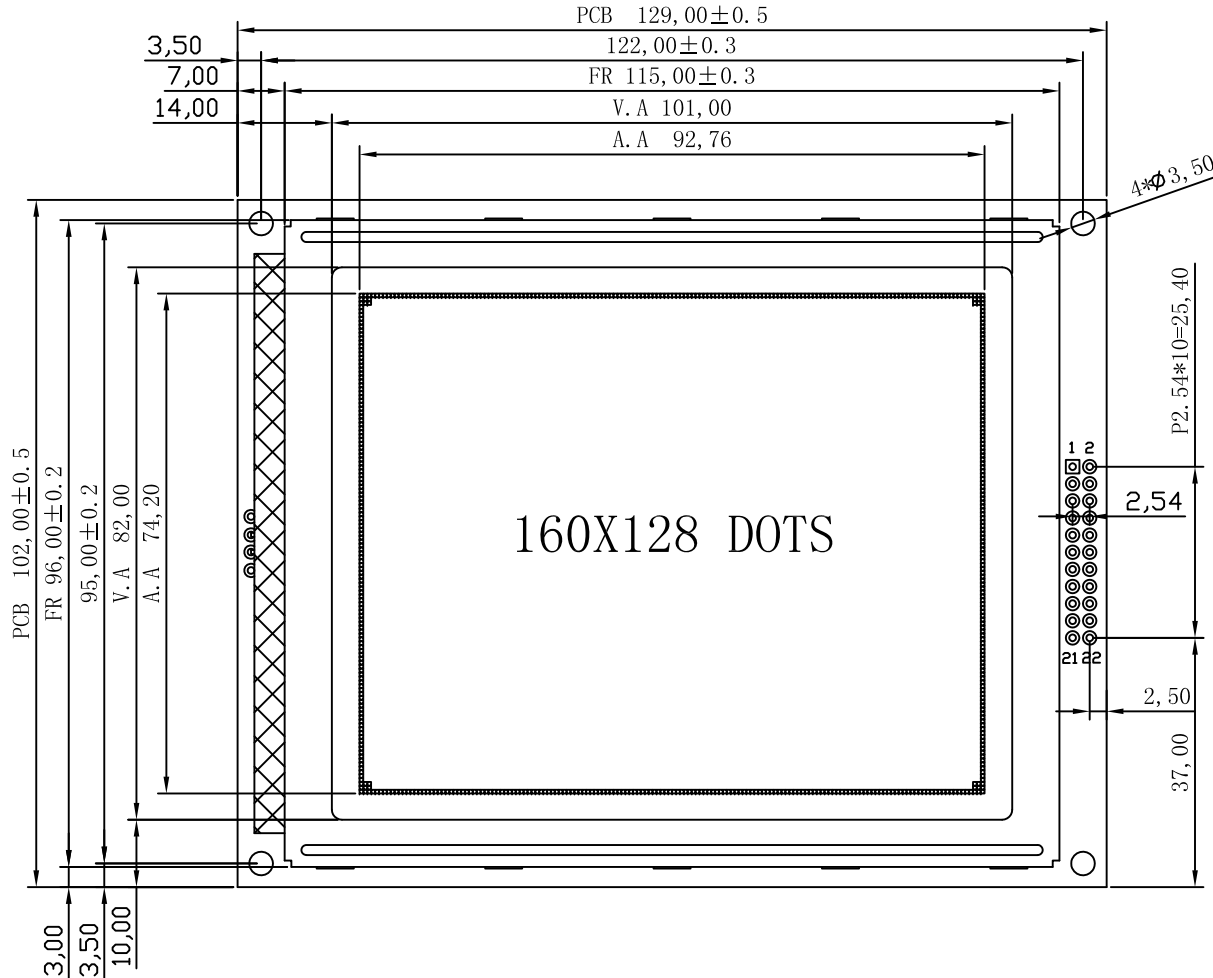

NO	Symbol
1	FG
2	VSS
3	VDD(5.0V)
4	V0
5	VEE
6	WR
7	RD
8	CE
9	C/D
10	/HALT
11	RST
12	DB0
13	DB1
14	DB2
15	DB3
16	DB4
17	DB5
18	DB6
19	DB7
20	N.C
21	LEDA
22	LEDK

- NOTES :
- 1. LCD TYPE: STN-Blue, Negative Transmissive
 - 2. OPERATING VOLTAGE: VDD=5.0V, Vop=16.0V
 - 3. VIEWING DIRECTION: 6 O'CLOCK
 - 4. DRIVE METHOD: 1/128 Duty, 1/12 Bias
 - 5. OPERATING TEMP: -20°C TO +70°C
 - 6. STORAGE TEMP: -30°C TO +80°C
 - 7. CONNECTOR TAPE: Zebra
 - 8. DRIVER IC: RA6963 or Equivalent
 - 9. BACKLIGHT: White
 - 10. ALL sub-parts and materials of the parts, must comply with the RoHS instructions of EU.

		SINDA DISPLAY TECHNOLOGY CO., LTD.	
SHEET: 1 of 1		MODEL NUMBER : SDGB160128-01SBW	VERSION: 1.0
APPROVALS	DATE	GENERAL TOL: ± 0.2	
DWN Mike	2013-08-04	UNITS: MM	
CHK		DO NOT SCALE THIS DRAWING.	
APP CJ	2013-08-04	www.sindadisplay.com	
		SCALE: 1:1	