



REV:	DESCRIPTION	BY	DATE
V1.0	New Issue	Mike	2013-05-16

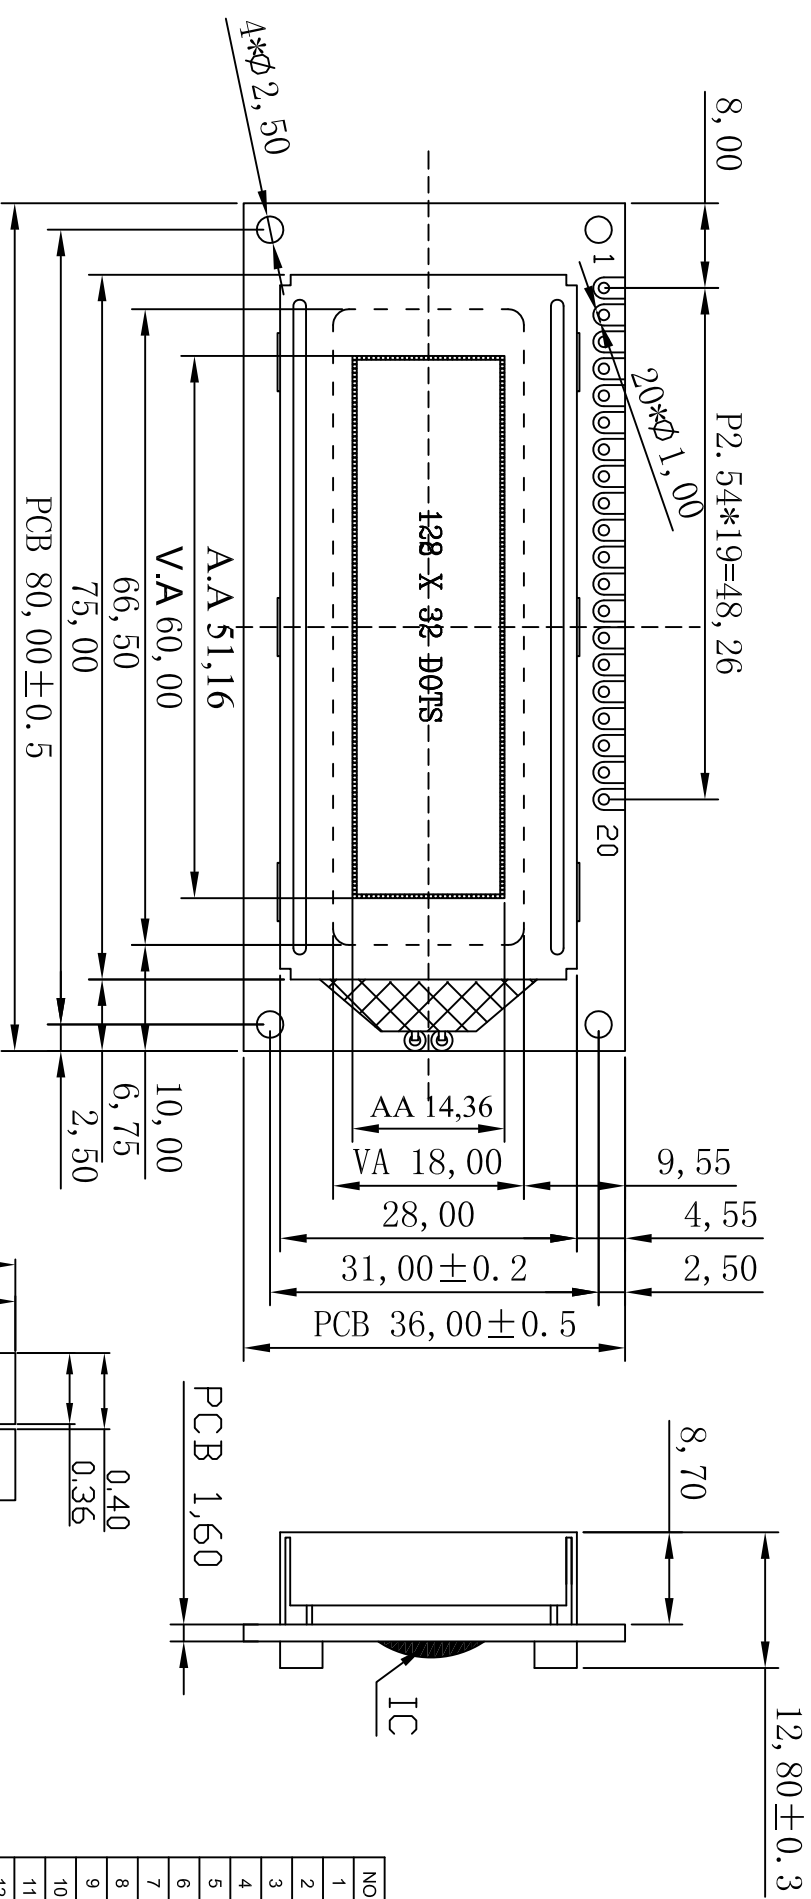

NO	Symbol
1	V0
2	VR
3	VSS
4	VDD
5	N/C
6	RS
7	R/W
8	E
9	DB0
10	DB1
11	DB2
12	DB3
13	DB4
14	DB5
15	DB6
16	DB7
17	PSB
18	RST
19	LEDA
20	LEDC



DOT SIZE

NOTES :

- LCD TYPE: STN Yellow-Green, Positive Transflective
- OPERATING VOLTAGE: VDD=5.0V, Vop=4.80V
- VIEWING DIRECTION: 6 O'CLOCK
- DRIVE METHOD: 1/32 Duty, 1/5 Bias
- OPERATING TEMP: -20°C TO +70°C
- STORAGE TEMP: -30°C TO +80°C
- CONNECTOR TAPE: Zebra
- DRIVER IC: ST7920 or Equivalent
- BACKLIGHT: Yellow-Green
- ALL sub-parts and materials of the parts, must comply with the RoHS instructions of EU.

		SINDA DISPLAY TECHNOLOGY CO., LTD.	
SHEET: 1 of 1		VERSION: 1.0	
APPROVALS	DATE	GENERAL TOL: ± 0.2	
DWN Mike	2013-05-16	DO NOT SCALE THIS DRAWING.	
CHK		UNITS: MM	
APP	CJ	SCALE: 1:1	
2013-05-16		www.sindadisplay.com	