

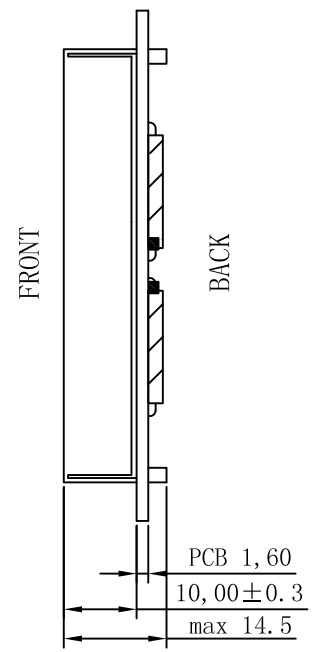


REV:	DESCRIPTION	BY	DATE
V1.0	New issue	Mike	2018-06-14


D  
C  
B  
A

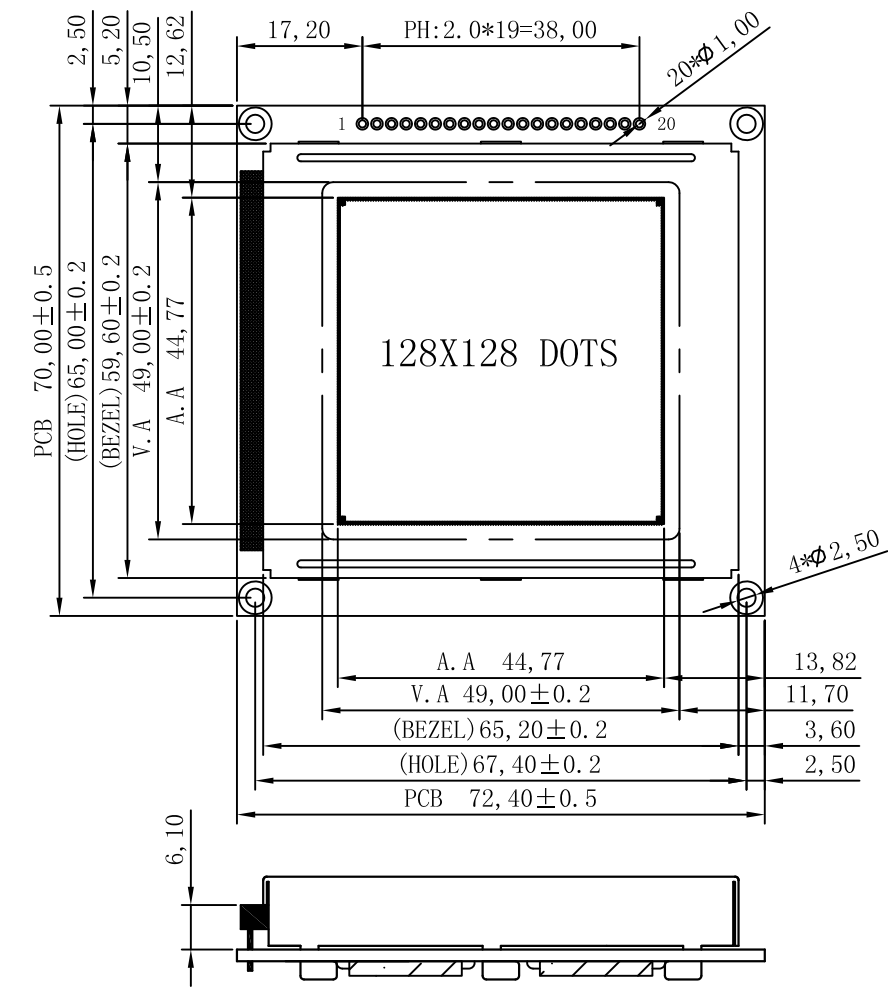

DOT SIZE

NO	Symbol
1	DB0
2	DB1
3	DB2
4	DB3
5	DB4
6	DB5
7	DB6
8	DB7
9	RS
10	R/W
11	E
12	/CS
13	/RES
14	V0
15	VDD
16	VSS
17	NC
18	NC
19	LEDA
20	LEDK

- NOTES :
- |   |   |
|---|---|
| 1. LCD TYPE:                                  | FSTN, Positive Transfletive                   |
| 2. OPERATING VOLTAGE:                         | VDD=5.0V, Vop=18.5V                           |
| 3. VIEWING DIRECTION:                         | 6 O'CLOCK                                     |
| 4. DRIVE METHOD:                              | 1/128 Duty, 1/12 Bias                         |
| 5. OPERATING TEMP:                            | -20°C TO +70°C                                |
| 6. STORAGE TEMP:                              | -30°C TO +80°C                                |
| 7. CONNECTOR TAPE:                            | Zebra   |
| 8. DRIVER IC:                                 | RA6963 or Equivalent                          |
| 9. BACKLIGHT:                                 | Yellow-Green LED 5PCS If=15*5mA               |
| 10. ALL sub-parts and materials of the parts, | must comply with the RoHS instructions of EU. |

 <b>SINDA DISPLAY TECHNOLOGY CO., LTD.</b>				
SHEET: 1 of 1		MODEL NUMBER : SDGB128128FSYG-02	VERSION: 1.0	UNITS: MM
APPROVALS	DATE	GENERAL TOL: ± 0.2		
DWN	SD-03	DO NOT SCALE THIS DRAWING.		
CHK				
APP	SD-11			
		www.sindadisplay.com		SCALE: 1:1