
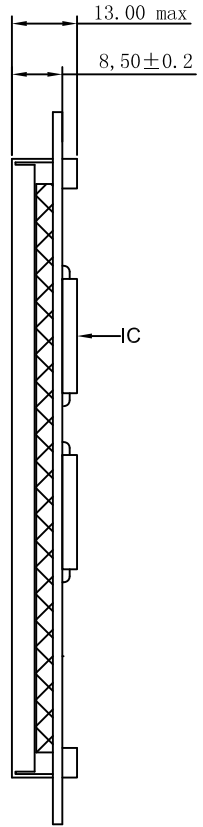


REV:	DESCRIPTION	BY	DATE
V1.0	New issue		2016-10-20

D
C
B
A

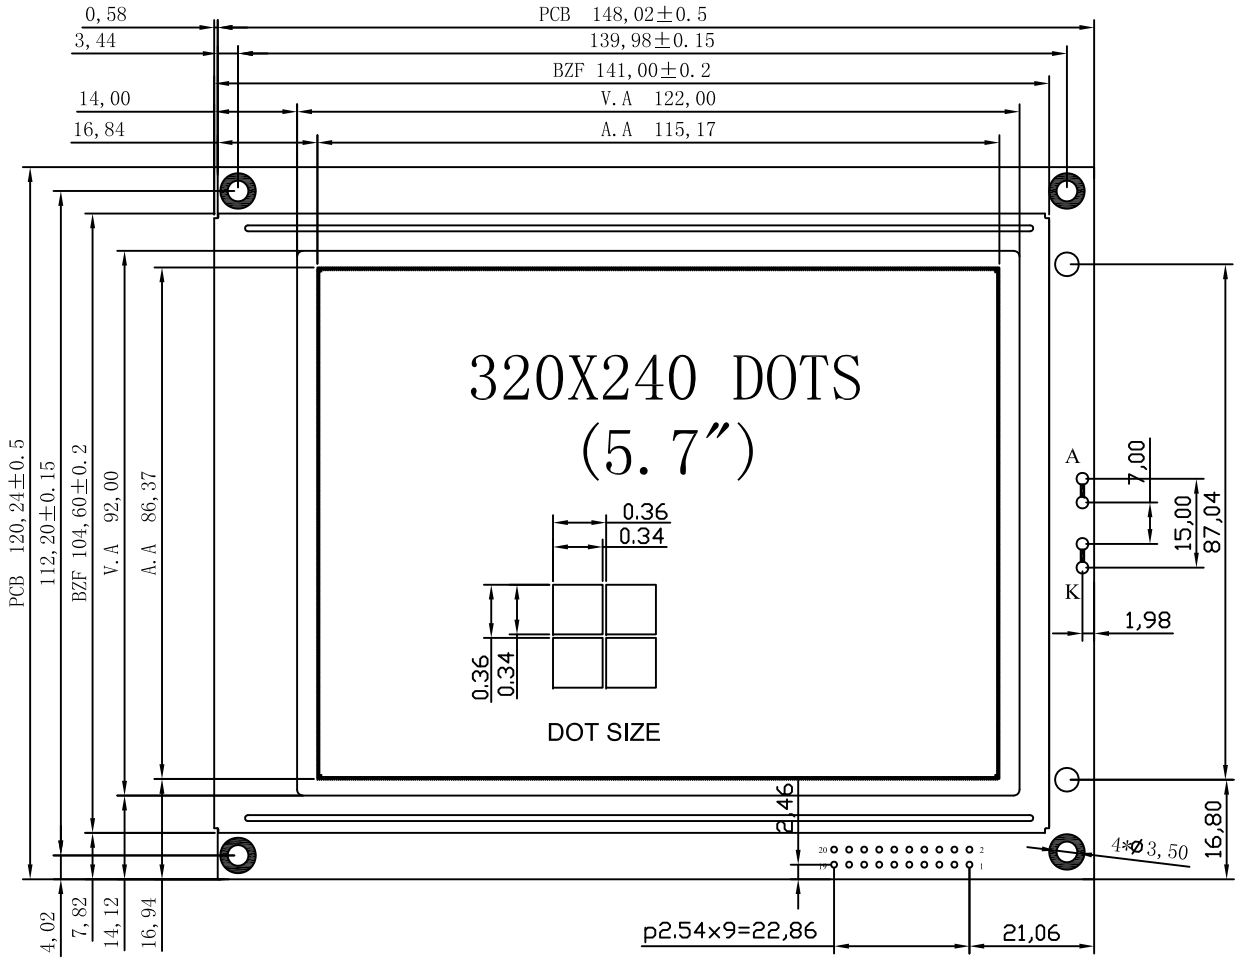

NO	SYMBOL
1	VSS
2	VDD
3	V0
4	/RD
5	/WR
6	A0
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	/CS
16	/RES
17	VEE
18	FGND
19	LEDA
20	LEDK

NOTES :

- | | |
|---|---------------------------------|
| 1. LCD TYPE: | STN-Blue, Negative Transmissive |
| 2. OPERATING VOLTAGE: | VDD=5.0V, Vop=23.0V |
| 3. VIEWING DIRECTION: | 6 O'CLOCK |
| 4. DRIVE METHOD: | 1/240Duty, 1/17 Bias |
| 5. OPERATING TEMP: | -20°C TO +70°C |
| 6. STORAGE TEMP: | -30°C TO +80°C |
| 7. CONNECTOR TAPE: | Zebra |
| 8. DRIVER IC: | RA8835 or Equivalent |
| 9. BACKLIGHT: | White |
| 10. ALL sub-parts and materials of the parts, must comply with the RoHS instructions of EU. | |

		SINDA DISPLAY TECHNOLOGY CO., LTD.	
SHEET: 1 of 1		MODEL NUMBER : SDGB320240H	VERSION: 1.0
APPROVALS	DATE	UNITS: MM	
DWN	LZH	GENERAL TOL: ± 0.2	
CHK		DO NOT SCALE THIS DRAWING.	
APP	Mike	SCALE: 1:1	
		www.sindadisplay.com	