



REV:	DESCRIPTION	BY	DATE
V1.0	New Issue	Mike	2014-09-16

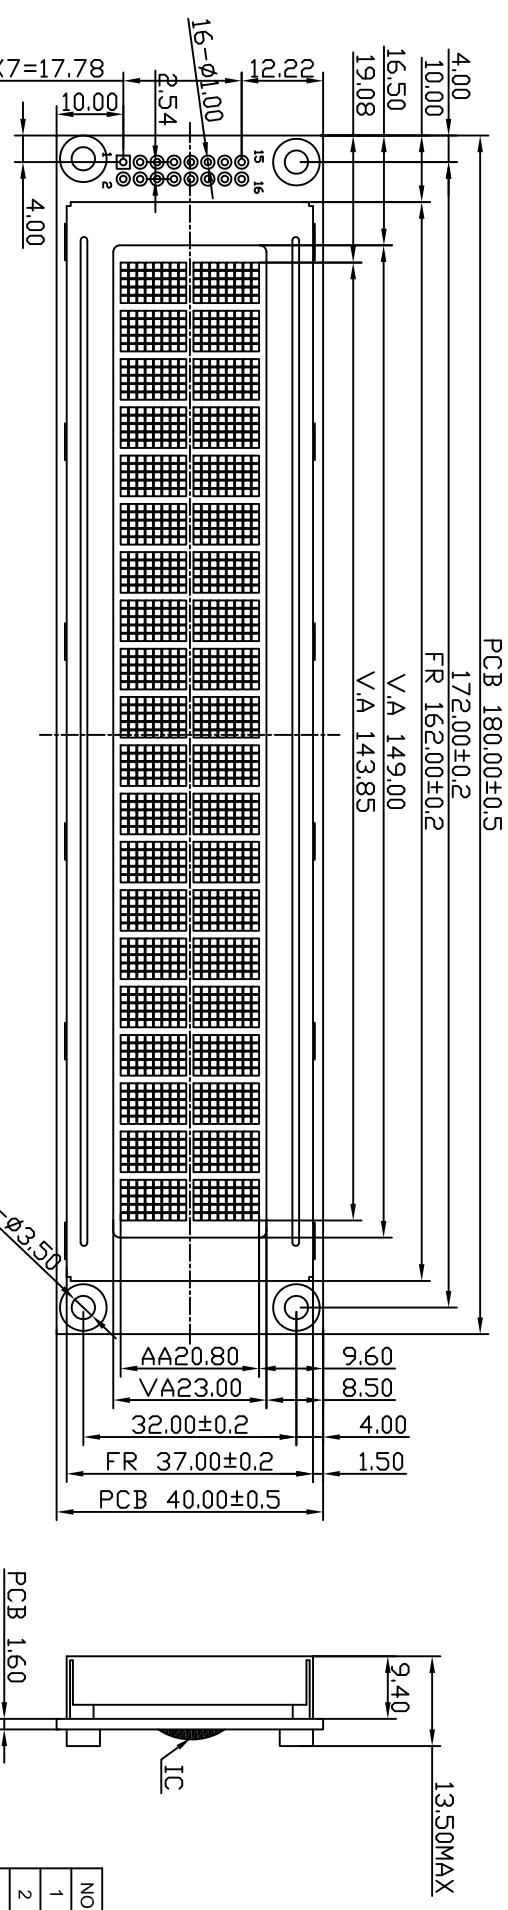

NO	Symbol
1	VSS
2	VDD
3	V0
4	RS
5	RW
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	A
16	K

NOTES:

- LCD TYPE: STN-Blue, Negative Transmissive
- OPERATING VOLTAGE: VDD=5.0V, Vop=5.0V
- VIEWING DIRECTION: 6 O'CLOCK
- DRIVE METHOD: 1/16 Duty, 1/5 Bias
- OPERATING TEMP: -20°C TO +70°C
- STORAGE TEMP: -30°C TO +80°C
- CONNECTOR TAPE: Zebra
- DRIVER IC: AIP31066 or Equivalent
- BACKLIGHT: White
- ALL sub-parts and materials of the parts must comply with the RoHS instructions of EU.



SINDA DISPLAY TECHNOLOGY CO., LTD.

SHEET: 1 of 1	MODEL NUMBER: SDCB2002-02	VERSION: 1.0	UNITS: MM
APPROVALS: Mike	DATE: 2014-09-16	GENERAL TOL: ± 0.2	DO NOT SCALE THIS DRAWING.
CHK: CJ	APP: 2014-09-16	SCALE: 1:1	

www.sindadisplay.com