

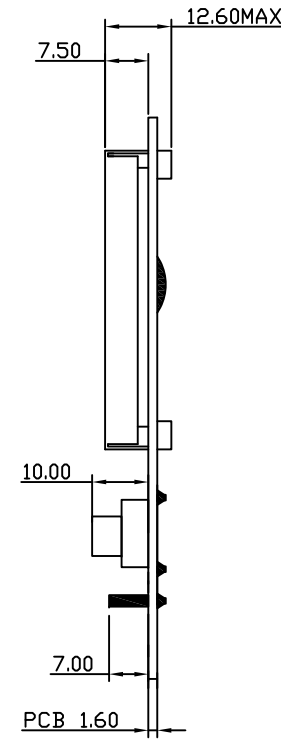


REV:	DESCRIPTION	BY	DATE
V1.0	New issue		2018-05-08
V2.0	Update CON2/CON3		2018-05-18
V3.0	Update CON1		2018-05-24
V4.0	Update CON2/CON3-16,17,18		2019-02-21

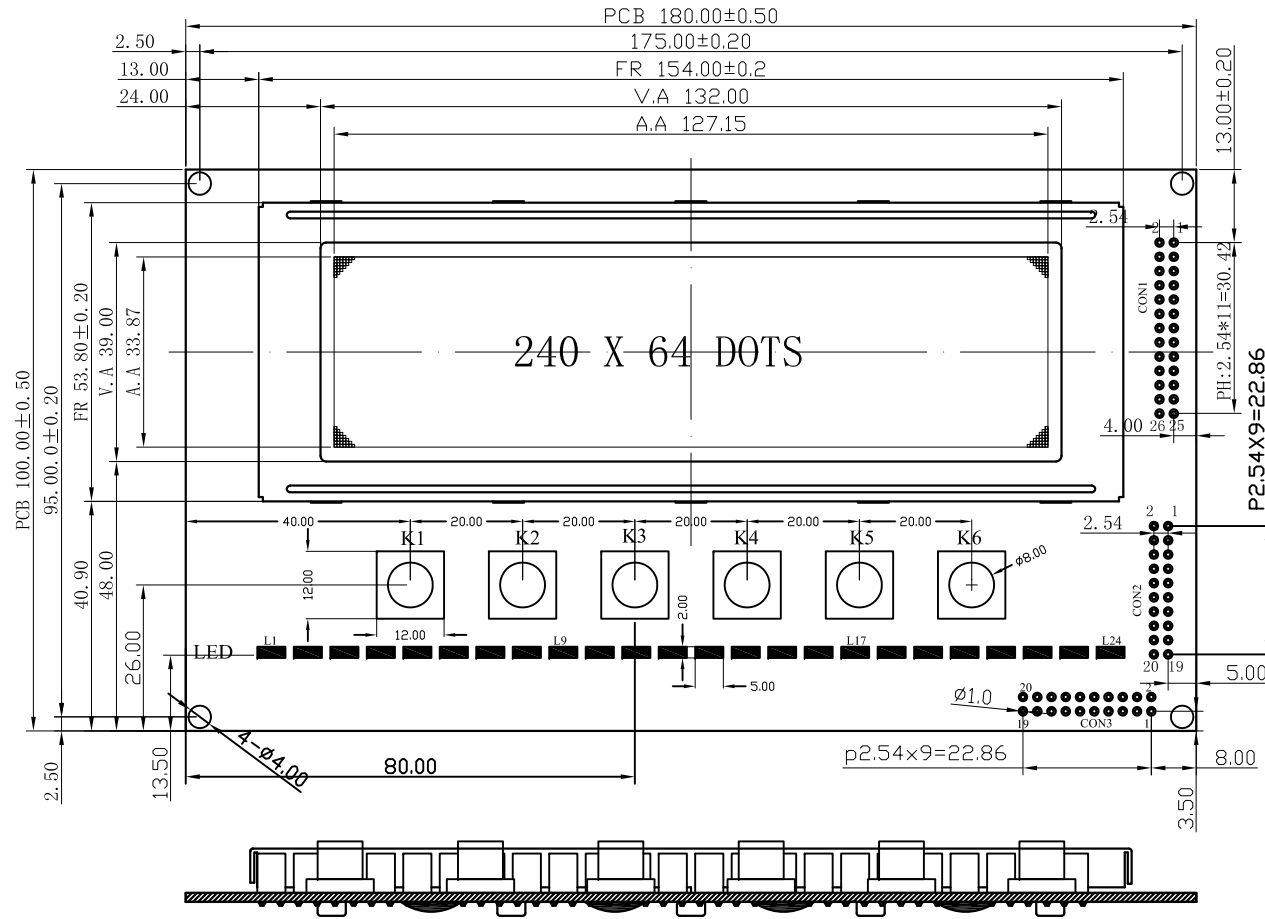

CON1	
INTERFACE	
1	FG
2	VSS
3	VDD(5V)
4	NC
5	/WR

CON2/CON3		
INTERFACE		
1	C1	7 /CE
2	R1	8 C/D
3	C2	9 M-CS
4	R2	10 /RST
5	C3	11 DB0
6	R3	12 DB1
7	C4	13 DB2
8	R4	14 DB3
9	C5	15 DB4
10	R5	16 DB5
11	C6	17 DB6
12	R6	18 DB7
13	C7	19 FS
14	R7	20 NC
15	PWR	21 A
16	M-SI	22 RK
17	VDD(5.0V)	23 GK
18	M-CLK	24 BK
19	GND	25 M-SI
20	STB	26 M-CLK



- NOTES :
- | | |
|---|---------------------------------|
| 1. LCD TYPE: | STN-Blue, Negative Transmissive |
| 2. OPERATING VOLTAGE: | VDD=5.0V, Vop=12.0V |
| 3. VIEWING DIRECTION: | 6 O'CLOCK |
| 4. DRIVE METHOD: | 1/64 Duty, 1/19 Bias |
| 5. OPERATING TEMP: | -20°C TO +70°C |
| 6. STORAGE TEMP: | -30°C TO +80°C |
| 7. CONNECTOR TAPE: | Zebra |
| 8. DRIVER IC: | RA6963 or Equivalent |
| 9. BACKLIGHT: | White |
| 10. ALL sub-parts and materials of the parts, must comply with the RoHS instructions of EU. | |

		SINDA DISPLAY TECHNOLOGY CO., LTD.	
SHEET: 1 of 1		MODEL NUMBER : SDGB24064-03	VERSION: 4.0
APPROVALS	DATE	UNITS: MM	
DWN	SD-03 2019-02-21	GENERAL TOL: ± 0.2	
CHK		DO NOT SCALE THIS DRAWING.	
APP	SD-11 2019-02-21	SCALE: 1:1	
www.sindadisplay.com			