

8

7

6

5


4

3

2

1




REV:	DESCRIPTION	BY	DATE
V1.0	New issue		2017-03-18

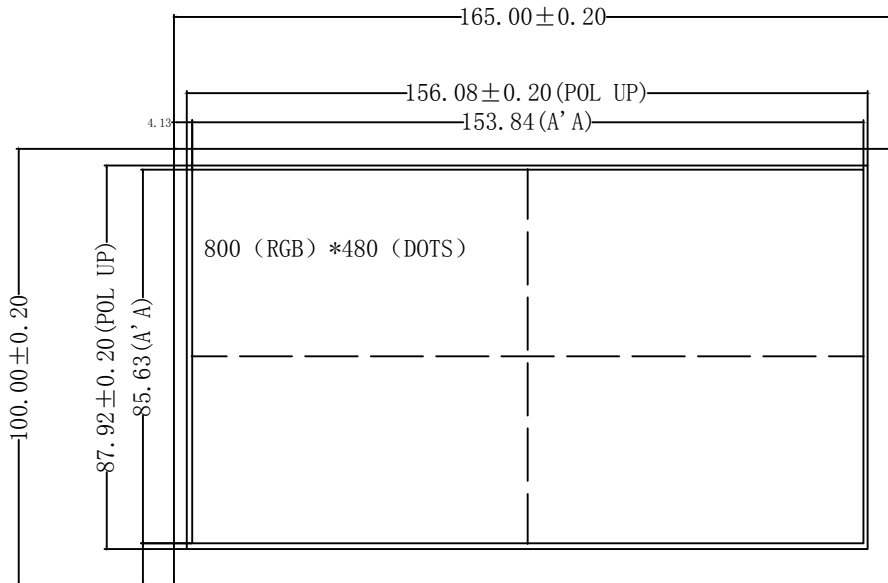

3.50±0.2



Terminal No.	Symbol
1	VLED-
2	VLED+
3	GND
4	Vcc
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	DGND
30	CLK
31	DISP
32	HSYNC
33	VSYNC
34	DE
35	NC
36	GND
37	X_R
38	Y_D
39	X_L
40	Y_U

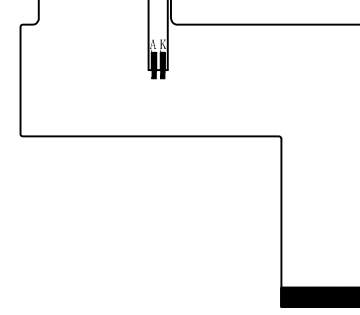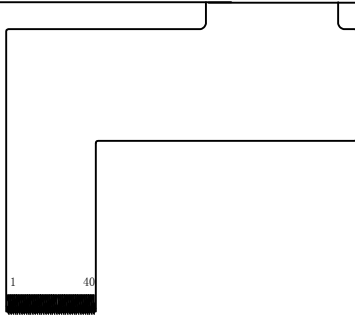

电路图: 7\*2=14 LED  
If=40mA Iv=21.6V

- Notes:
- Unit:mm.
  - Do not scale drawing.
  - All radii without dimension R0.2.
  - Modification Mark.
  - draft angle: 1°
  - Backlight luminance :cd/m<sup>2</sup>(Min)
  - Luminance uniformity: 80%(min) (min/max\*100%)
  - UnSpecified Tolerance is ±0.2
  - Operation conditions : If= mA, Vf=V(MAX)  
Color coordinate:X=0.27-0.31,Y=0.27-0.31
  - All materials comply with RoHS
  - The measured value of luminance and color coordinate bases SHL's BM-7

		<b>SINDA DISPLAY TECHNOLOGY CO., LTD.</b>	
SHEET: 1 of 1		MODEL NUMBER : <b>SDT07002N-40</b>	VERSION: 1.0 GENERAL TOL:± 0.2 DO NOT SCALE THIS DRAWING.
APPROVALS	DATE	UNITS: MM	
DWN SD-03	2017-03-18		
CHK			
APP SD-11	2017-03-18		
www.sindadisplay.com		SCALE: 1:1	

8

7

6

5

4

3

2

1