



REV:	DESCRIPTION	BY	DATE
V1.0	New Issue	Mike	2013-12-16

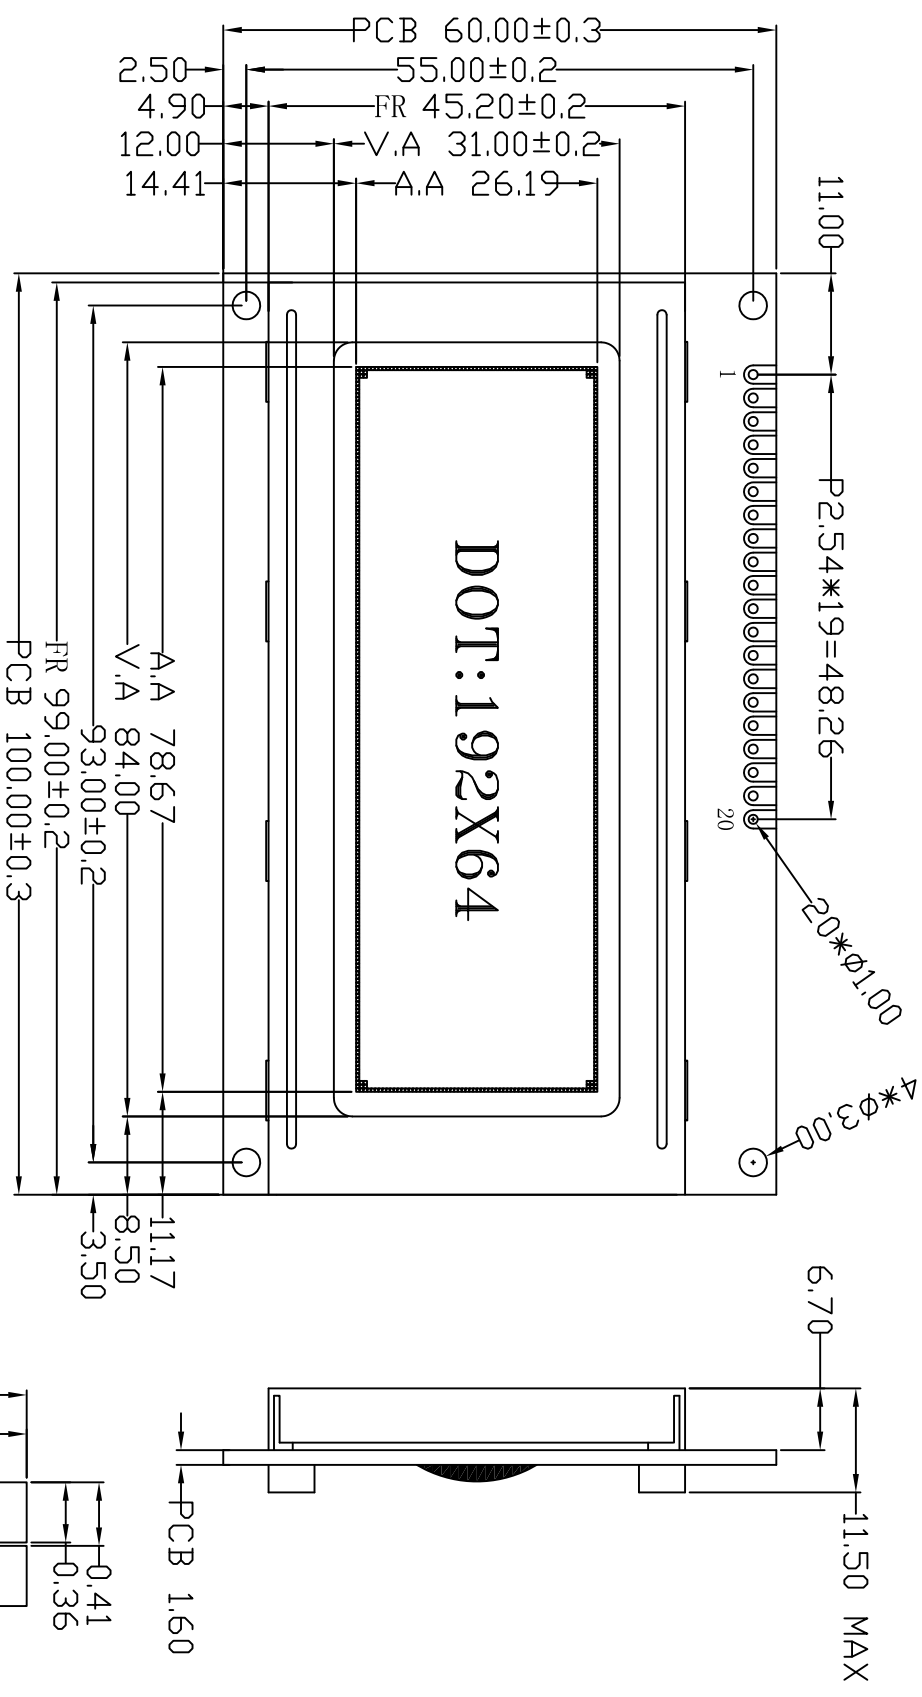

NOTES:

- LCD TYPE: STN Yellow-Green, Positive Transflective
- OPERATING VOLTAGE: VDD=5.0V, Vop=12.0V
- VIEWING DIRECTION: 6 O'CLOCK
- DRIVE METHOD: 1/64 Duty, 1/9 Bias
- OPERATING TEMP: -20°C TO +70°C
- STORAGE TEMP: -30°C TO +80°C
- CONNECTOR TAPE: Zebra
- DRIVER IC: AIP31107 or Equivalent
- BACKLIGHT: Yellow-Green(Side)
- ALL sub-parts and materials of the parts, must comply with the RoHS instructions of EU.



NO	Symbol
1	DB7
2	DB6
3	DB5
4	DB4
5	DB3
6	DB2
7	DB1
8	DB0
9	E
10	R/W
11	R/S
12	V0
13	VDD(5.0V)
14	VSS
15	CSA
16	CSB
17	VEE
18	RST
19	LED(A(5.0V))
20	LEDK

		SINDA DISPLAY TECHNOLOGY CO., LTD.	
SHEET: 1 of 1		MODEL NUMBER:	VERSION: 1.0
APPROVALS	DATE	SDGB19264-01	GENERAL TOL: ± 0.2
DWN	2013-12-16	www.sindadisplay.com	DO NOT SCALE THIS DRAWING.
CHK			SCALE: 1:1
APP			