REV:	DESCRIPTION	BY	DATE
V1.0	New issue	SD-06	2015-04-25

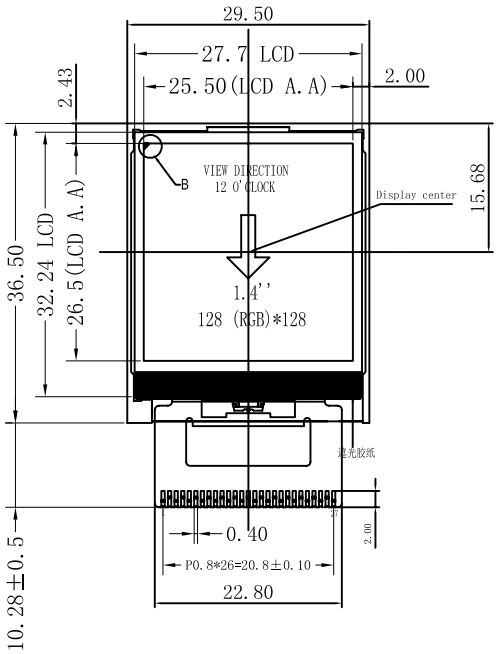

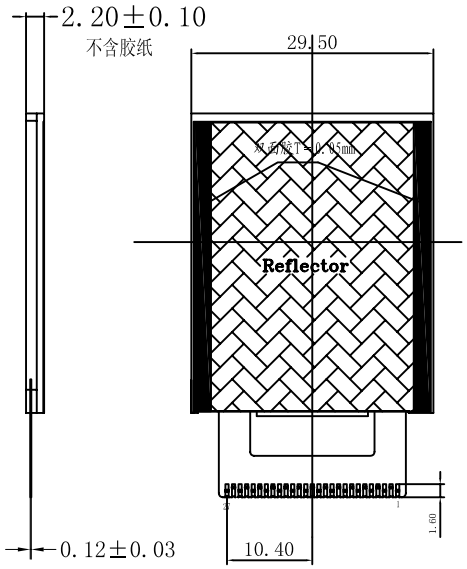

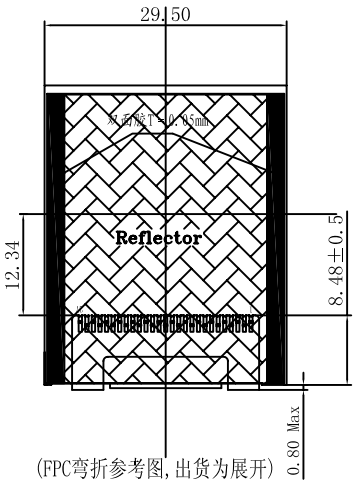

No:	PIN NAME
1	VCI(2.8V)
2	GND
3	NC
4	NC
5	CS
6	RS(D/C)
7	RD
8	WR
9	RESET
10	DB0
11	NC
12	DB1
13	NC
14	DB2
15	NC
16	DB3
17	NC
18	DB4
19	NC
20	DB5
21	NC
22	DB6
23	NC
24	DB7
25	NC
26	LED-K
27	LED-A



BL CIRCUIT DIAGRAM



DETAIL "B"
SCALE 20:1

Interface:8080-8BIT

NOTE:
1. Display Type: 1.4"TFT, Transmisive
2. Driver IC:ST7735S
3. Viewing Direction: 12 O'clock
4. Connector:27PIN 0.8mm 的焊接
5. Operating Temperature: -20° - +70°
6. Storage Temperature: -30° - +80°
7. Backlight Type: 1White LEDS
8. BL Input Current: 15 or 18mA
9. LCM Brightness: 150 cd/m Typ

SHEET: 1 of 1		
APPROVALS		DATE
DWN	SD-06	2015-04-25
CHK		
APP	SD-11	2015-04-25

SINDA DISPLAY TECHNOLOGY CO., LTD.

MODEL NUMBER :
SDT01401-A27

VERSION: 1.0
GENERAL TOL:± 0.2
DO NOT SCALE THIS DRAWING.
UNITS: MM

www.sindadisplay.com

SCALE: 1:1