



REV:	DESCRIPTION	BY	DATE
V1.0	New issue	Mike	2016-08-25
V2.0	Update I/O	Mike	2016-08-31

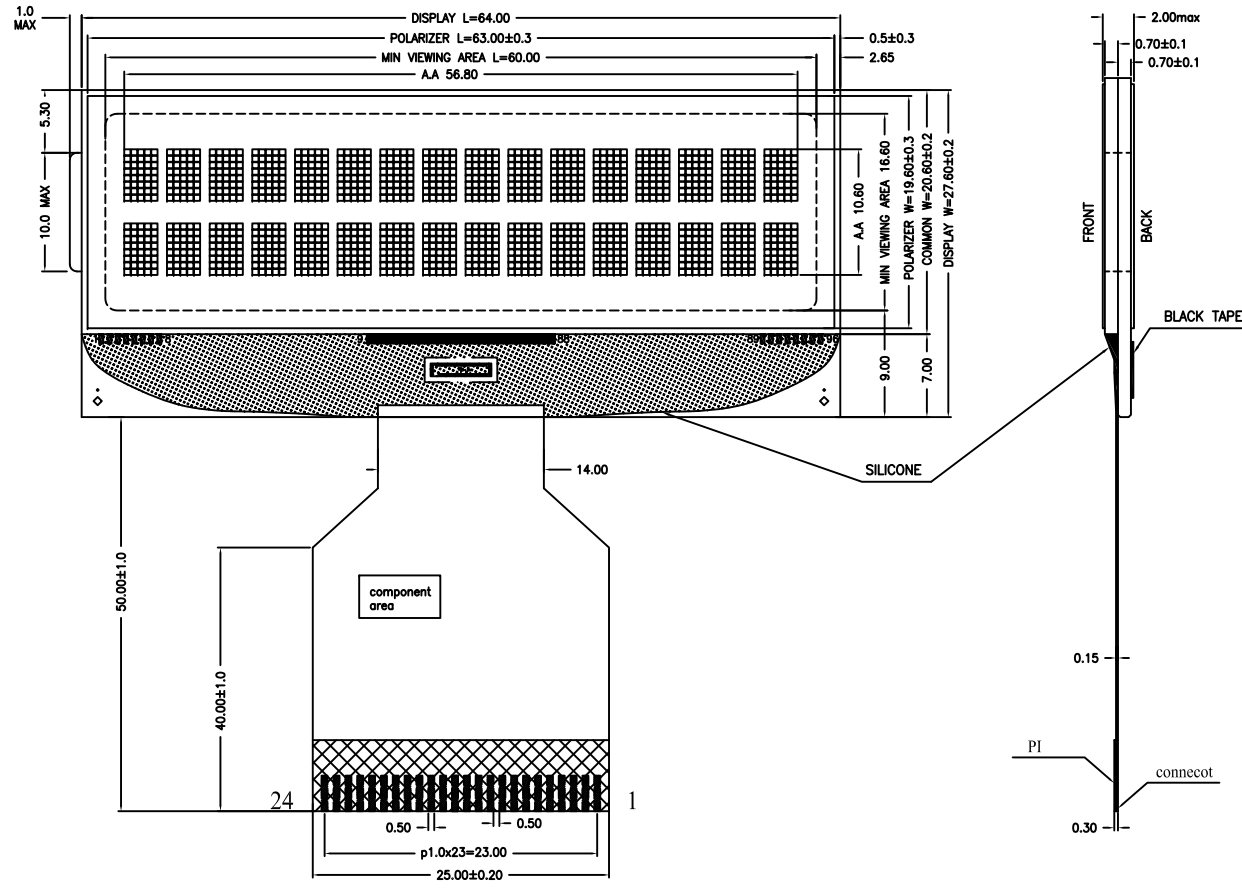

NO	Symbol
1	RS
2	E
3	RW
4	DB7
5	DB6
6	DB5
7	DB4
8	DB3
9	DB2
10	DB1
11	DB0
12	VDD
13	VSS
14	NC
15	NC
16	NC
17	NC
18	NC
19	NC
20	VSS
21	VDD
22	PSB
23	NC
24	RESET

NOTES :

- |   |   |
|---|---|
| 1. LCD TYPE:                                  | FSTN Positive Reflective                      |
| 2. OPERATING VOLTAGE:                         | VDD=3.3V, Vop=4.8V                            |
| 3. VIEWING DIRECTION:                         | 6 O'CLOCK                                     |
| 4. DRIVE METHOD:                              | 1/16 Duty, 1/5 Bias                           |
| 5. OPERATING TEMP:                            | -20°C TO +70°C                                |
| 6. STORAGE TEMP:                              | -30°C TO +80°C                                |
| 7. CONNECTOR TAPE:                            | FPC   |
| 8. DRIVER IC:                                 | ST7032 or Equivalent                          |
| 9. BACKLIGHT:                                 | Without                                       |
| 10. ALL sub-parts and materials of the parts, | must comply with the RoHS instructions of EU. |

 <b>SINDA DISPLAY TECHNOLOGY CO., LTD.</b>	
SHEET: 1 of 1	
APPROVALS	DATE
DWN Mike	2016-08-31
CHK	
APP CJ	2016-08-31
MODEL NUMBER : SDCG1602-1	
VERSION: 2.0	UNITS: MM
GENERAL TOL: ± 0.2	
DO NOT SCALE THIS DRAWING.	
www.sindadisplay.com	
SCALE: 1:1	