
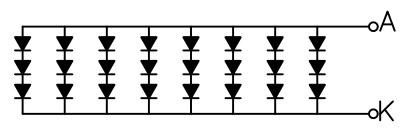


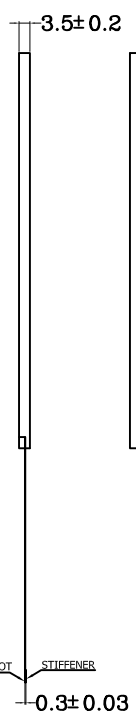


REV:	DESCRIPTION	BY	DATE
V1.0	New issue		2020-11-08

Front View

Side View

Back View

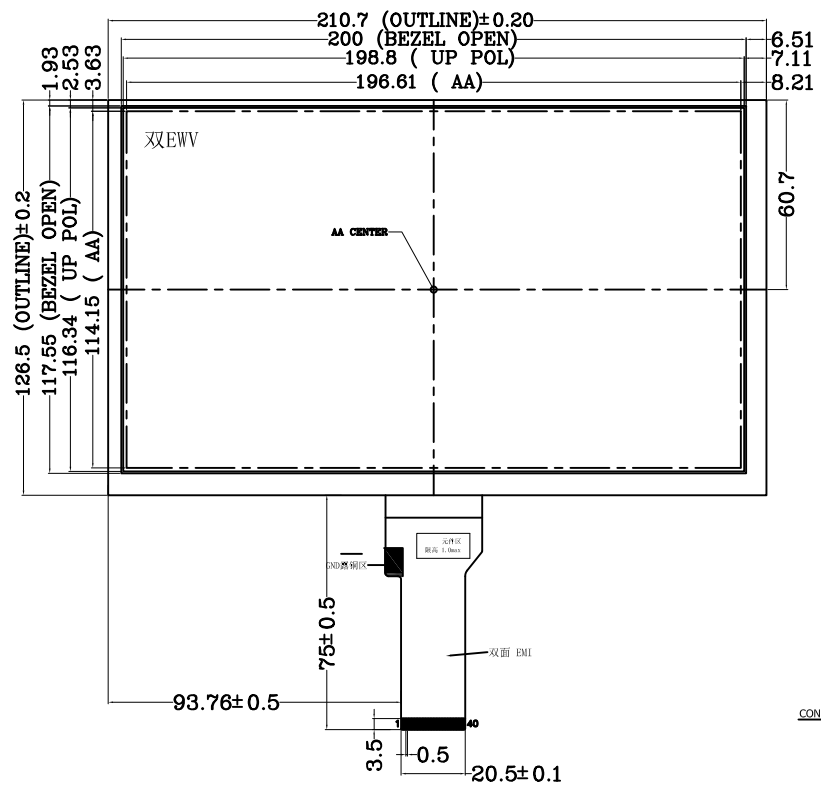

Backlight LED Circuit
9.6V/160mA TYP

PIN DESCRIPTION

Pad No.	Pad Name
1	VCOM
2	VDD
3	VDD
4	NC
5	RESET
6	STBYB
7	GND
8	RINO-
9	RINO+
10	GND
11	RIN1-
12	RIN1+
13	GND
14	RIN2-
15	RIN2+
16	GND
17	LVDS_CLK-
18	LVDS_CLK+
19	GND
20	RIN3-
21	RIN3+
22	GND
23	NC
24	NC
25	GND
26	NC
27	DIMO
28	SELB
29	AVDD
30	GND
31	LED-
32	LED-
33	L/R
34	U/D
35	VGL
36	CABCEN1
37	CABCEN0
38	VGH
39	LED+
40	LED+

Display Type	9.0" TN TFT TRANSMISSIVE
Viewing Angle	12 O'clock
Drive Voltage	3.3V
Backlight	3*8=24 PCS LEDES VF=9.6, IF=160mA
Luminance	230cd/m2(TYP)
Operation Temperature	-20°C ~ +60°C
Storage Temperature	-30°C ~ +70°C
Interface	LVDS-4
Drive IC	--
All radii without dimension Unspecified tolerance is	±0.2
All product materials meet ROHS and halogen-free requirements	

		SINDA DISPLAY TECHNOLOGY CO., LTD.	
SHEET: 1 of 1		MODEL NUMBER : SDT09003N-A40	VERSION: 1.0 GENERAL TOL: ± 0.2 DO NOT SCALE THIS DRAWING.
APPROVALS	DATE	UNITS: MM	
DWN	SD-03	2020-11-08	
CHK			
APP	SD-11	2020-11-08	
www.sindadisplay.com		SCALE: 1:1	