



REV:	DESCRIPTION	BY	DATE
V1.0	New issue	SD-04	2017-05-30

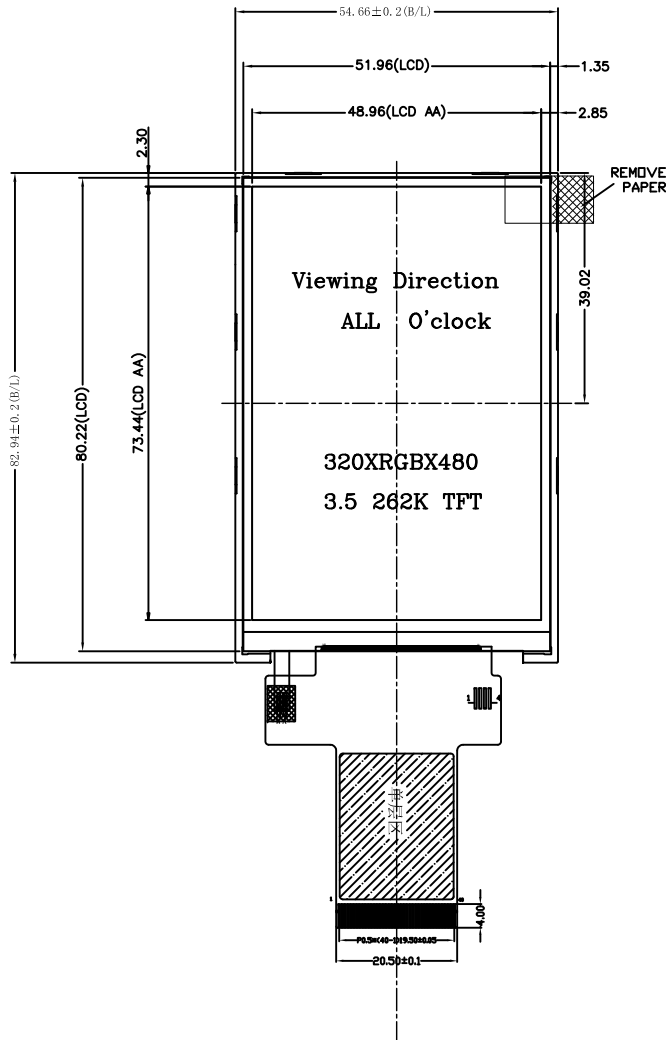

(不含双面胶, FPC及焊锡厚度)

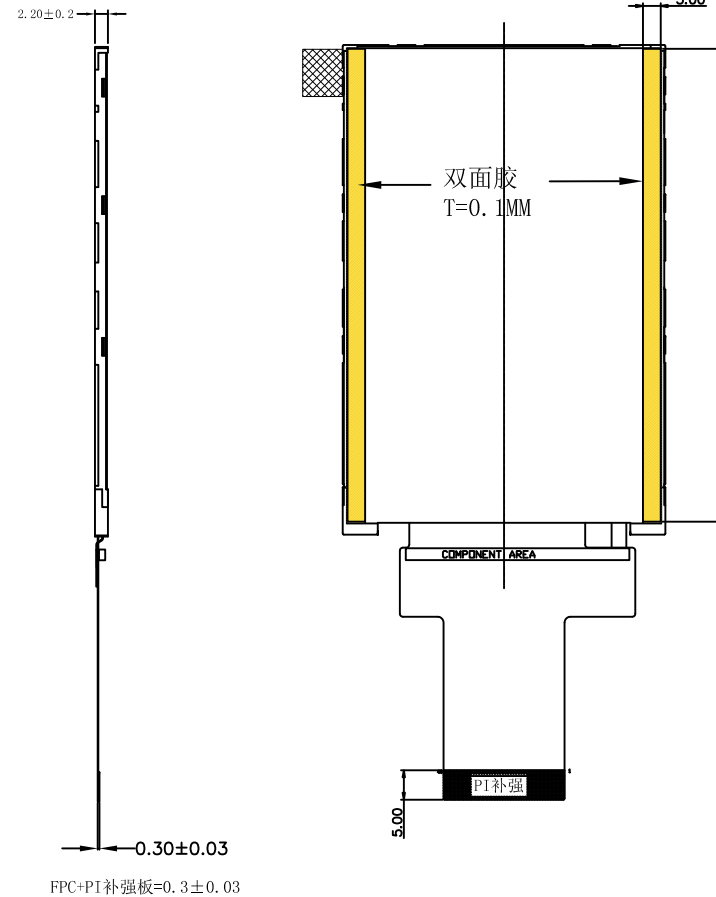


FPC折弯后示意图
展开出货


1	X+
2	Y+
3	X-
4	Y-
5	GND
6	VCC
7	VCC
8	FMARK
9	CS
10	RS
11	WR/SCL
12	RD
13	SDI
14	SDO
15	RESET
16	GND
17	DB0
18	DB1
19	DB2
20	DB3
21	DB4
22	DB5
23	DB6
24	DB7
25	DB8
26	DB9
27	DB10
28	DB11
29	DB12
30	DB13
31	DB14
32	DB15
33	A
34	LEDK1
35	LEDK2
36	LEDK3
37	GND
38	IM0
39	IM1
40	IM2

NOTES:

1. DISPLAY TYPE: TFT TRANSMISSIVE
2. VIEWING DIRECTION: ALL O' CLOCK
2. OPERATING TEMP: -20° ~70°
3. STORAGE TEMP: -30° ~80°
4. DRIVER IC: COG ILI9488
5. BACK LIGHT: 6 CHIP WHITE LED

BLU CIRCUIT :DC 3.2V 120MA 280CD/M2



 SINDA DISPLAY TECHNOLOGY CO., LTD.	
SHEET: 1 of 1	
APPROVALS DATE	
DWN	SD-04 2017-05-30
CHK	
APP	SD-11 2017-05-30
MODEL NUMBER : VERSION: 1.0 UNITS: MM	
SDT03507N-40 GENERAL TOL: ± 0.2	
DO NOT SCALE THIS DRAWING.	
www.sindadisplay.com SCALE: 1:1	