



REV:	DESCRIPTION	BY	DATE
V1.0	New issue	Mike	2013-04-16

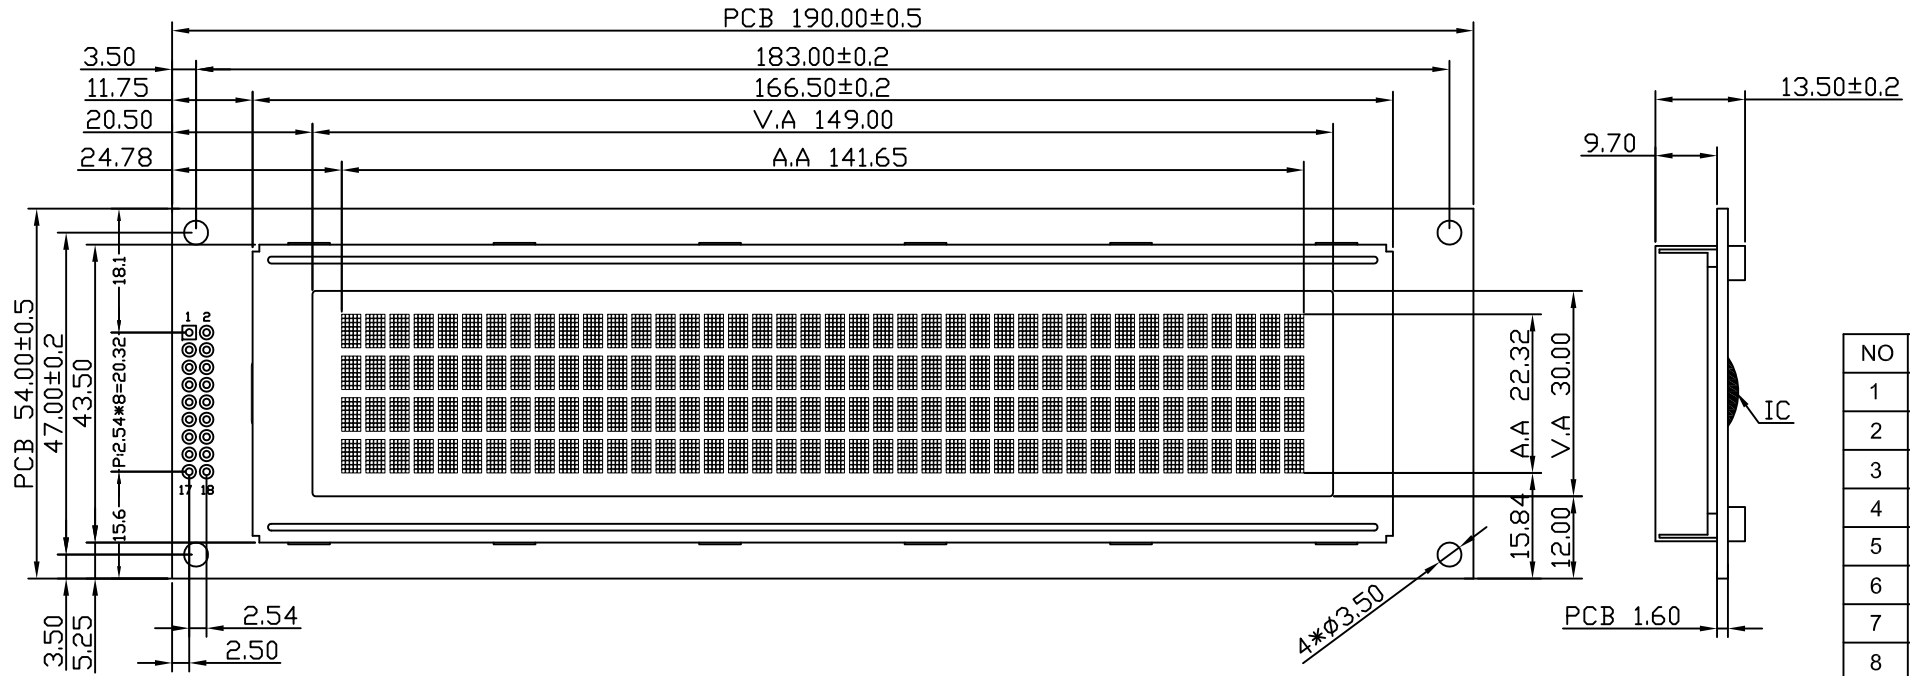


NO	Symbol
1	DB7
2	DB6
3	DB5
4	DB4
5	DB3
6	DB2
7	DB1
8	DB0
9	E1
10	RW
11	RS
12	V0
13	VSS
14	VDD
15	E2
16	NC
17	A
18	K

NOTES :

- |   |                                |
|---|--------------------------------|
| 1. LCD TYPE:  | STN Y-G, Positive Transmissive |
| 2. OPERATING VOLTAGE:   | VDD=5.0V, Vop=5.0V             |
| 3. VIEWING DIRECTION:   | 6 O'CLOCK                      |
| 4. DRIVE METHOD:  | 1/16 Duty, 1/5 Bias            |
| 5. OPERATING TEMP:  | -20°C TO +70°C                 |
| 6. STORAGE TEMP:  | -30°C TO +80°C                 |
| 7. CONNECTOR TAPE:  | Zebra                          |
| 8. DRIVER IC:   | AIP31066 x2 or Equivalent      |
| 9. BACKLIGHT:   | yellow-green LED               |
| 10. ALL sub-parts and materials of the parts, must comply with the RoHS instructions of EU. |                                |



 <b>SINDA DISPLAY TECHNOLOGY CO., LTD.</b>		<b>UNITS:</b> MM	
SHEET: 1 of 1		MODEL NUMBER :	VERSION: 1.0
APPROVALS	DATE	SDCB4004YG-02	GENERAL TOL: ± 0.2
DWN Mike	2015-04-16		DO NOT SCALE THIS DRAWING.
CHK APP	CJ 2015-04-16		SCALE: 1:1
www.sindadisplay.com			