

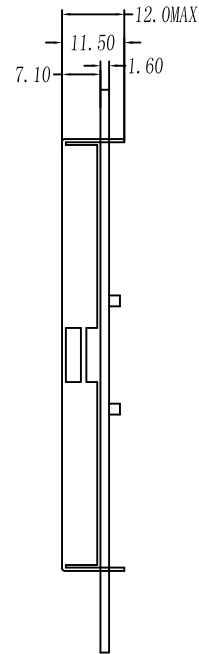


REV:	DESCRIPTION	BY	DATE
V00	New issue	XYP	2013-06-10

D  
C  
B  
A

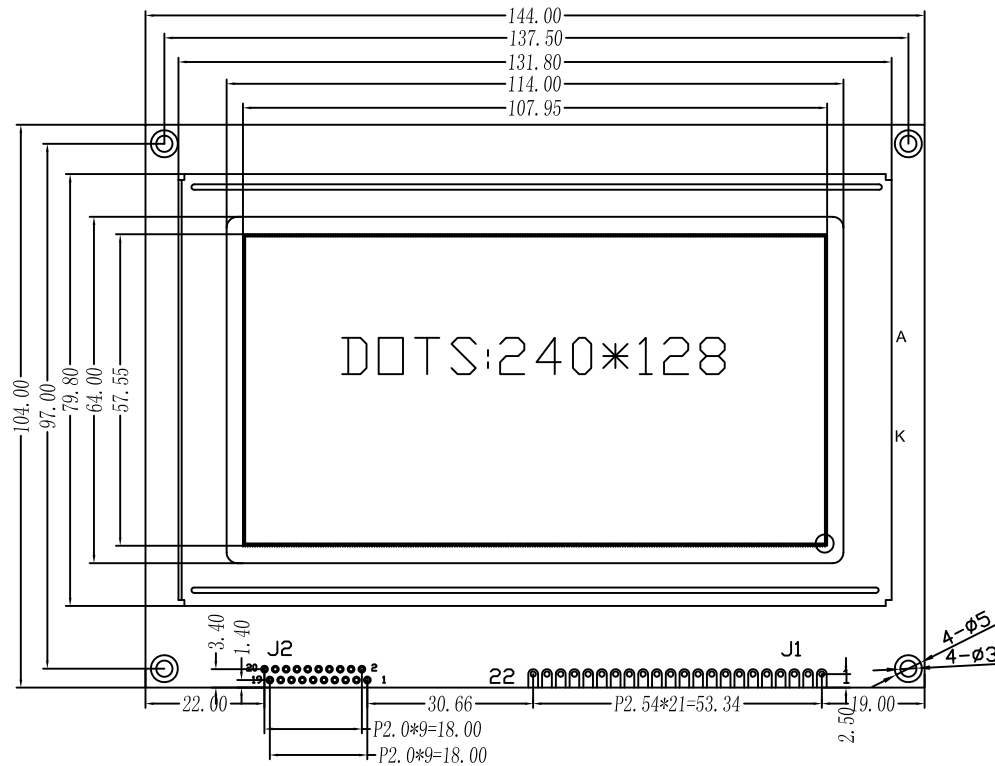

NOTES:


1. ALL DIMENSIONS ARE mm.
2. LCD TYPE: STN-BLUE, NEGATIVE
3. POLARIZER MODE: TRANSMISSIVE
4. OPERATING VOLTAGE: VDD=5.0V, Vop=17.0V
5. VIEWING DIRECTION: 6.00 O'CLOCK
6. DRIVE METHOD: 1/128 DUTY, 1/12 BIAS
7. OPERATING TEMP: -20°C TO +70°C.
8. STORAGE TEMP: -30°C TO +80°C.
9. CONNECTOR TAPE: ZEBRA
10. DRIVER IC: T6963 or Equivalent
11. BACKLIGHT: WHITE,
12. ALL sub-parts and materials of the parts must comply with the RoHS instructions of EU.

J2引脚定义

PIN	1	2	3	4	5	6	7	8	9	10
NAME	FG	GND	VDD	VO	/WR	/RD	/CE	C/D	RST	DB0
PIN	11	12	13	14	15	16	17	18	19	20
NAME	DB1	DB2	DB3	DB4	DB5	DB6	DB7	VEE	LEDA	LEDK

J1引脚定义

PIN	1	2	3	4	5	6	7	8	9	10	11
NAME	FG	GND	VDD	VO	/WR	/RD	/CE	C/D	NC	RST	DB0
PIN	12	13	14	15	16	17	18	19	20	21	22
NAME	DB1	DB2	DB3	DB4	DB5	DB6	DB7	FS1	VEE	LEDA	LEDK



**SINDA** SINDA DISPLAY TECHNOLOGY CO., LTD.

SHEET: 1 of 1		MODEL NUMBER : SDGB240128-03	SCALE: 1:1	UNITS: MM
APPROVALS	DATE	GENERAL TOL: ± 0.2		
DWN	XYP	2013-06-10	DO NOT SCALE THIS DRAWING.	
CHK			www.sindadisplay.com	
APP			VERSION: 1.0	