
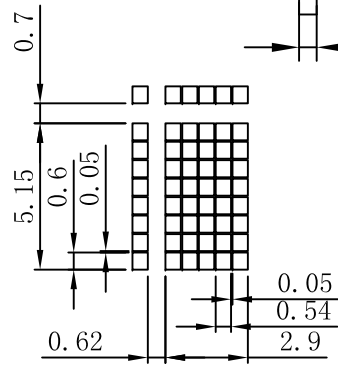
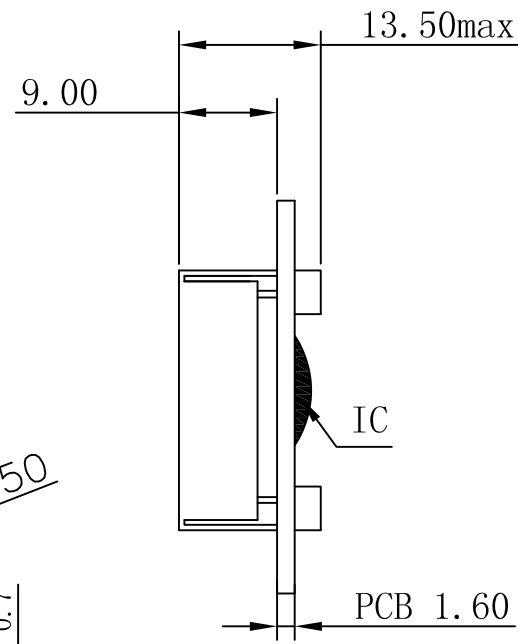


REV:	DESCRIPTION	BY	DATE
V1.0	New issue	SD-03	2019-03-28

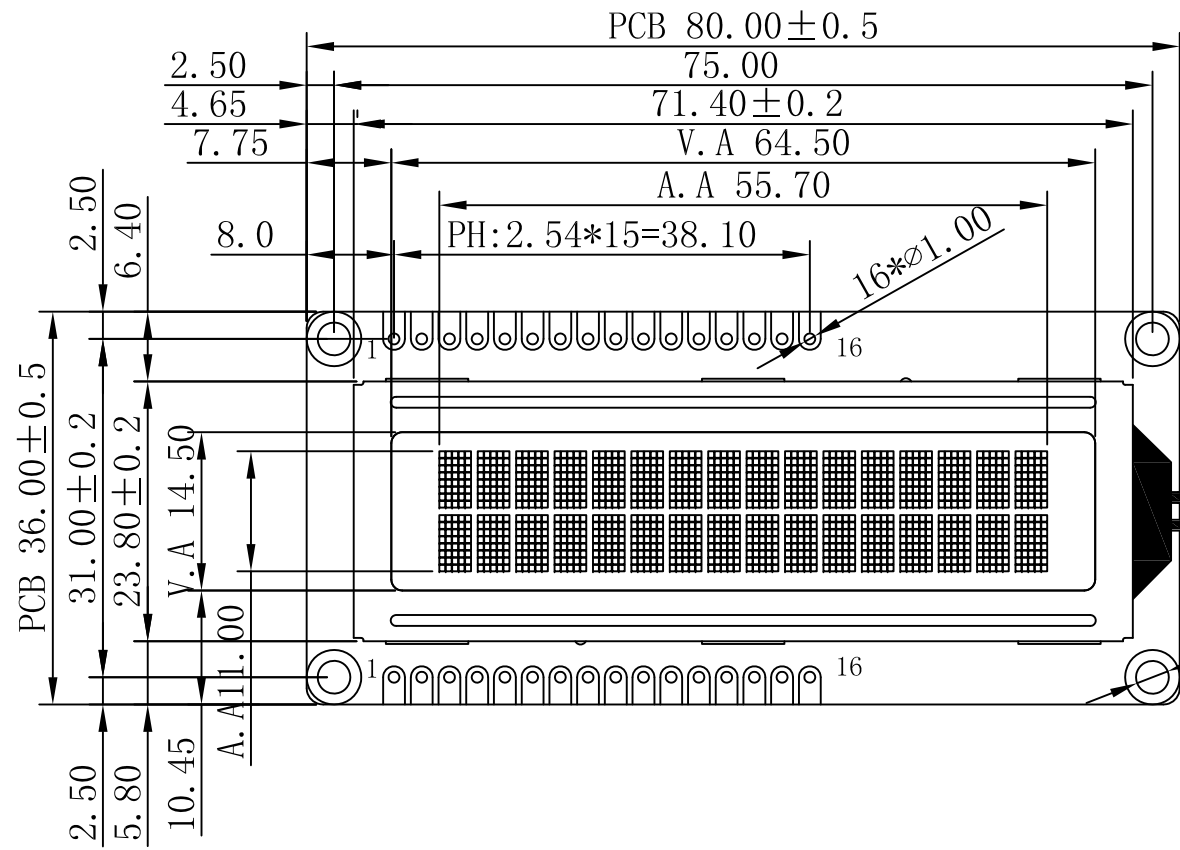

NO	Symbol
1	VSS
2	VDD
3	V0
4	RS
5	RW
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	A
16	K

NOTES :

- 1. LCD TYPE: STN Y-G, Positive Transmissive
- 2. OPERATING VOLTAGE: VDD=5.0V, Vop=4.70V
- 3. VIEWING DIRECTION: 6 O'CLOCK
- 4. DRIVE METHOD: 1/16 Duty, 1/5 Bias
- 5. OPERATING TEMP: -20°C TO +70°C
- 6. STORAGE TEMP: -30°C TO +80°C
- 7. CONNECTOR TAPE: Zebra
- 8. DRIVER IC: AIP31066 or Equivalent
- 9. BACKLIGHT: Yellow-Green, 1 pcs LED VF=3.1±0.2, IF=15mA
- 10. ALL sub-parts and materials of the parts, must comply with the RoHS instructions of EU.

SINDA DISPLAY TECHNOLOGY CO., LTD.				
SHEET: 1 of 1		MODEL NUMBER : SDCB1602-12	VERSION: 1.0	UNITS: MM
APPROVALS	DATE	GENERAL TOL: ± 0.2		
DWN SD-03	2019-03-28	DO NOT SCALE THIS DRAWING.		
CHK		www.sindadisplay.com		
APP SD-11	2019-03-28			
		SCALE: 1:1		