
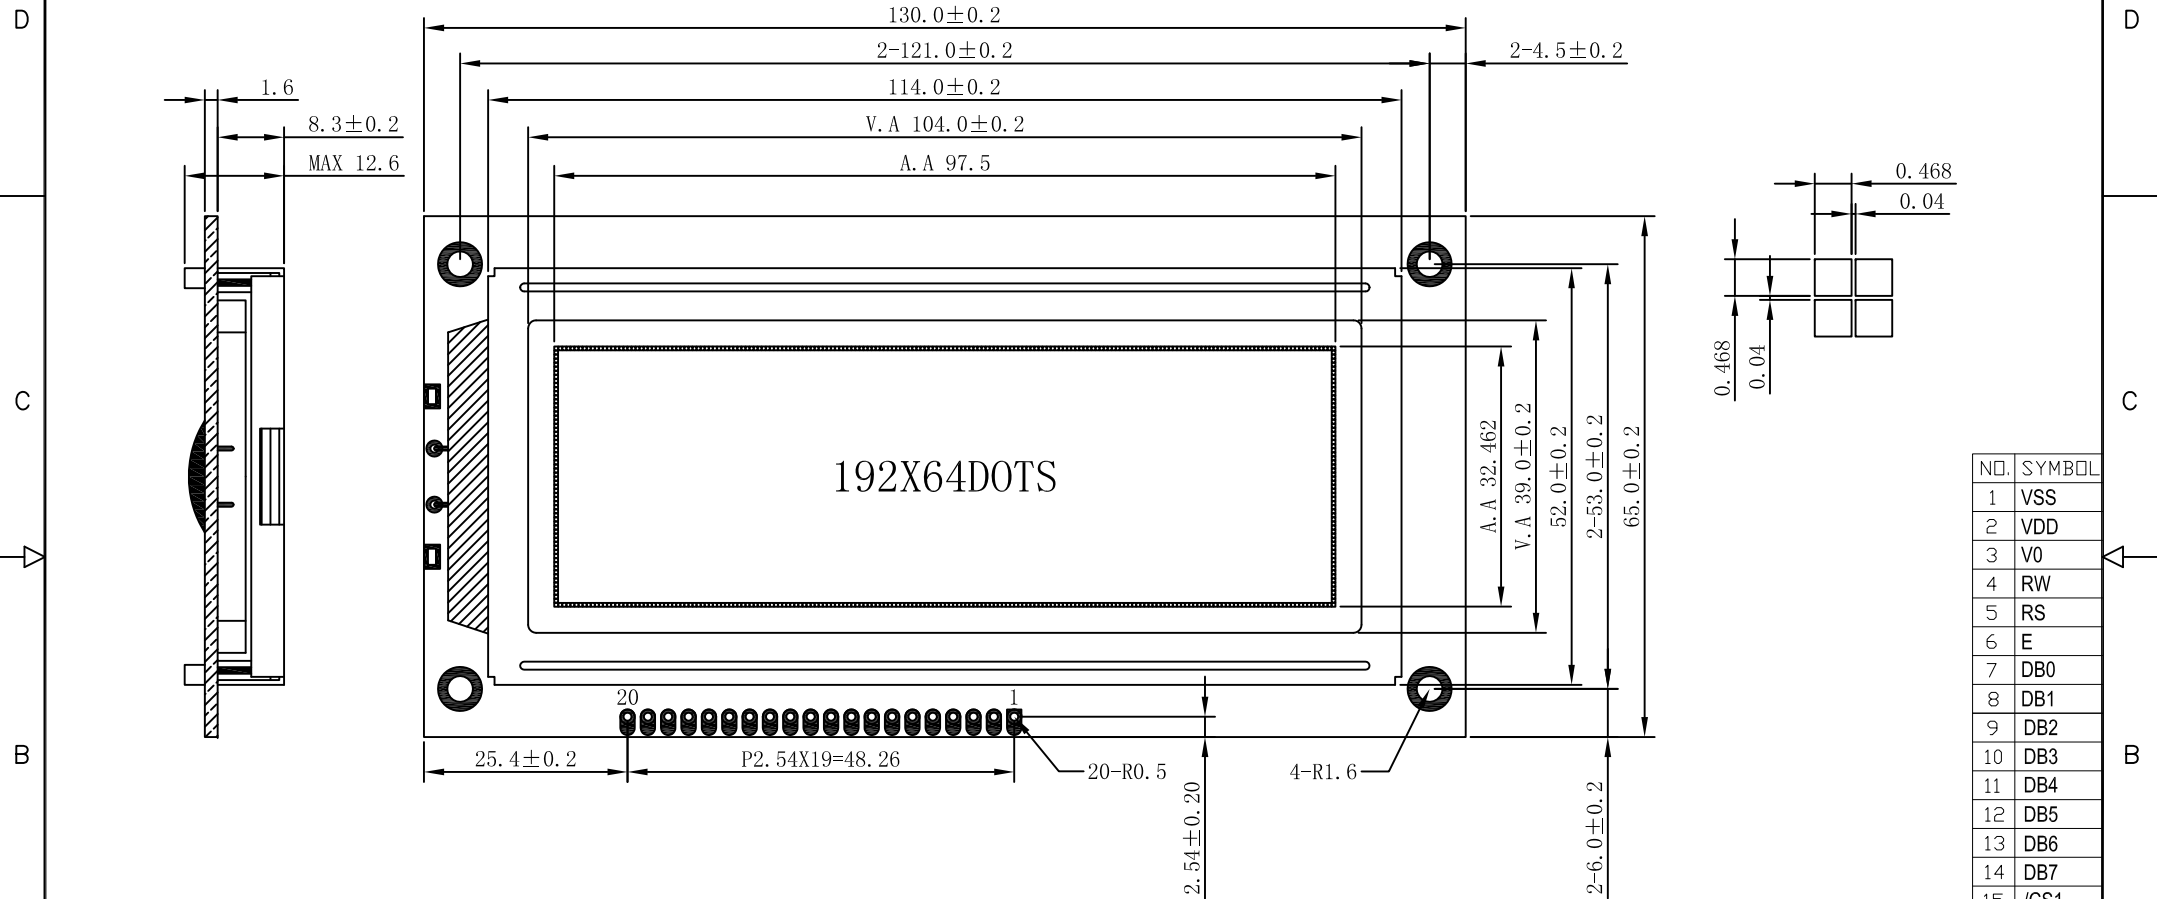


REV:	DESCRIPTION	BY	DATE
V1.0	New issue	SD-02	2014-12-16



NO.	SYMBOL
1	VSS
2	VDD
3	V0
4	RW
5	RS
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	/CS1
16	RST
17	/CS2
18	/CS3
19	VEE
20	BLA

- NOTES :
- | | |
|---|--|
| 1. LCD TYPE: | STN Yellow-Green, Positive Transflective |
| 2. OPERATING VOLTAGE: | VDD=5.0V, Vop=12.0V |
| 3. VIEWING DIRECTION: | 6 O'CLOCK |
| 4. DRIVE METHOD: | 1/64 Duty, 1/9 Bias |
| 5. OPERATING TEMP: | -20°C TO +70°C |
| 6. STORAGE TEMP: | -30°C TO +80°C |
| 7. CONNECTOR TAPE: | Zebra |
| 8. DRIVER IC: | AIP31107 or Equivalent |
| 9. BACKLIGHT: | Yellow-Green(Side) |
| 10. ALL sub-parts and materials of the parts, must comply with the RoHS instructions of EU. | |

		SINDA DISPLAY TECHNOLOGY CO., LTD.	
SHEET: 1 of 1		MODEL NUMBER :	VERSION: 1.0
APPROVALS		DATE	UNITS: MM
DWN	SD-02	2014-12-16	DO NOT SCALE THIS DRAWING.
CHK			
APP	SD-11	2014-12-16	
www.sindadisplay.com			SCALE: 1:1