



REV:	DESCRIPTION	BY	DATE
V1.0	New issue	Mike	2013-05-16

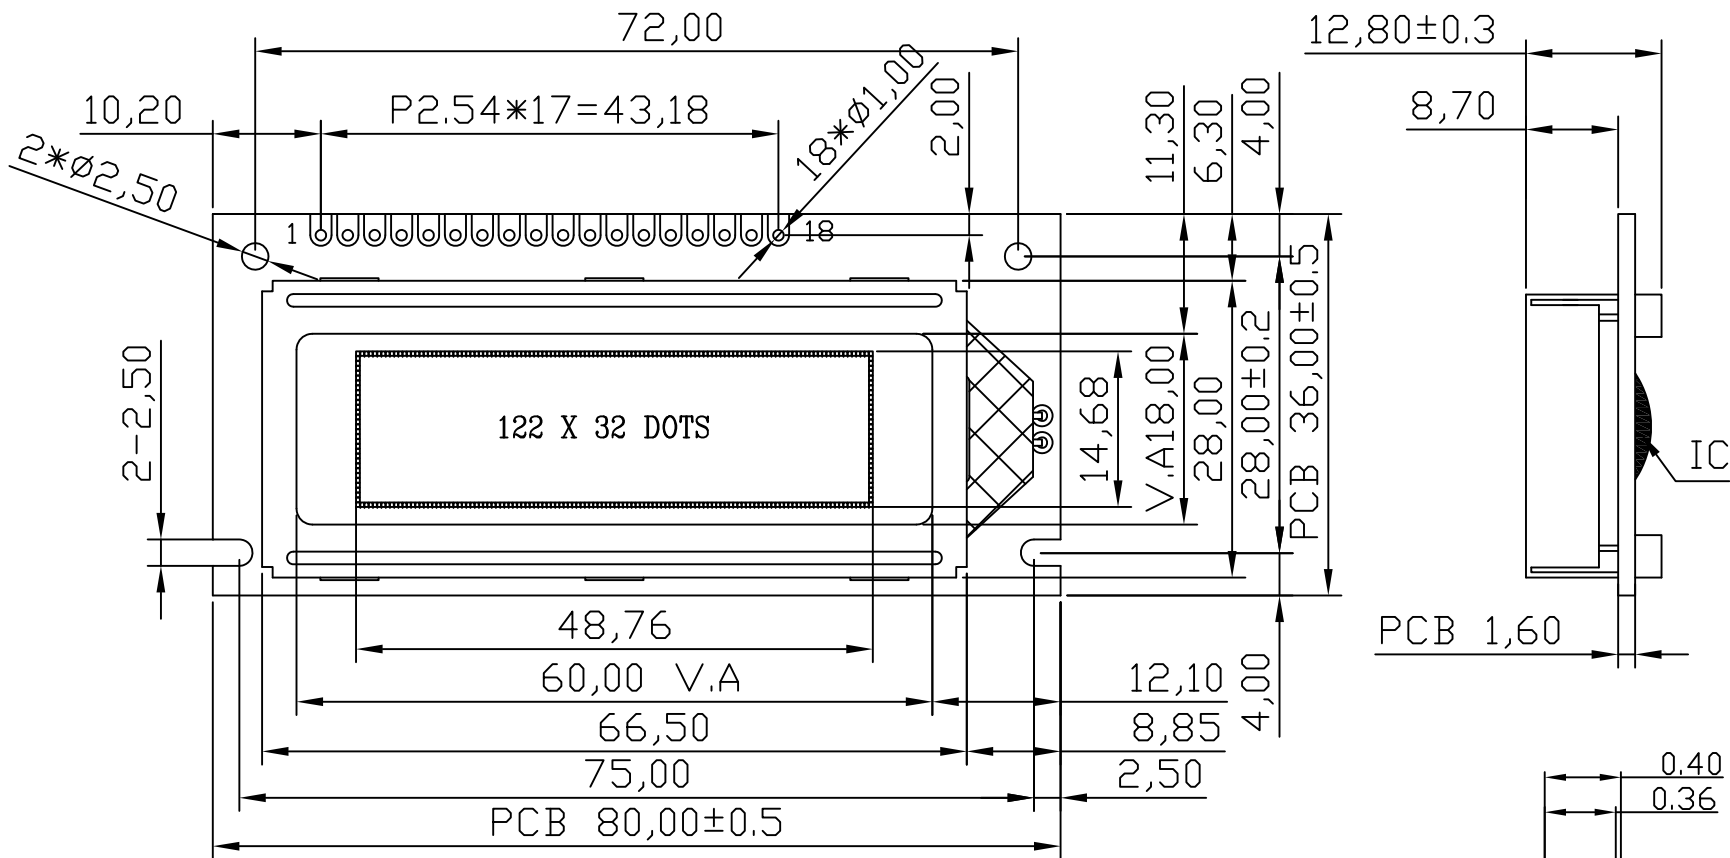

NO	Symbol
1	VDD
2	VSS
3	V0
4	E1
5	E2
6	R/W
7	RS
8	DB0
9	DB1
10	DB2
11	DB3
12	DB4
13	DB5
14	DB6
15	DB7
16	RST
17	LEDA
18	LEDK

- NOTES :
- | | |
|---|--|
| 1. LCD TYPE: | STN Yellow-Green, Positive Transflective |
| 2. OPERATING VOLTAGE: | VDD=5.0V, Vop=5.0V |
| 3. VIEWING DIRECTION: | 6 O'CLOCK |
| 4. DRIVE METHOD: | 1/32 Duty, 1/5 Bias |
| 5. OPERATING TEMP: | -20°C TO +70°C |
| 6. STORAGE TEMP: | -30°C TO +80°C |
| 7. CONNECTOR TAPE: | Zebra |
| 8. DRIVER IC: | SBN1661 or Equivalent |
| 9. BACKLIGHT: | Yellow-Green |
| 10. ALL sub-parts and materials of the parts, must comply with the RoHS instructions of EU. | |

 SINDA DISPLAY TECHNOLOGY CO., LTD.				
SHEET: 1 of 1		MODEL NUMBER : SDGB12232-04	VERSION: 1.0	UNITS: MM
APPROVALS	DATE	GENERAL TOL: ± 0.2		
DWN Mike	2013-05-16	DO NOT SCALE THIS DRAWING.		
CHK		www.sindadisplay.com		
APP CJ	2013-05-16			
		SCALE: 1:1		