
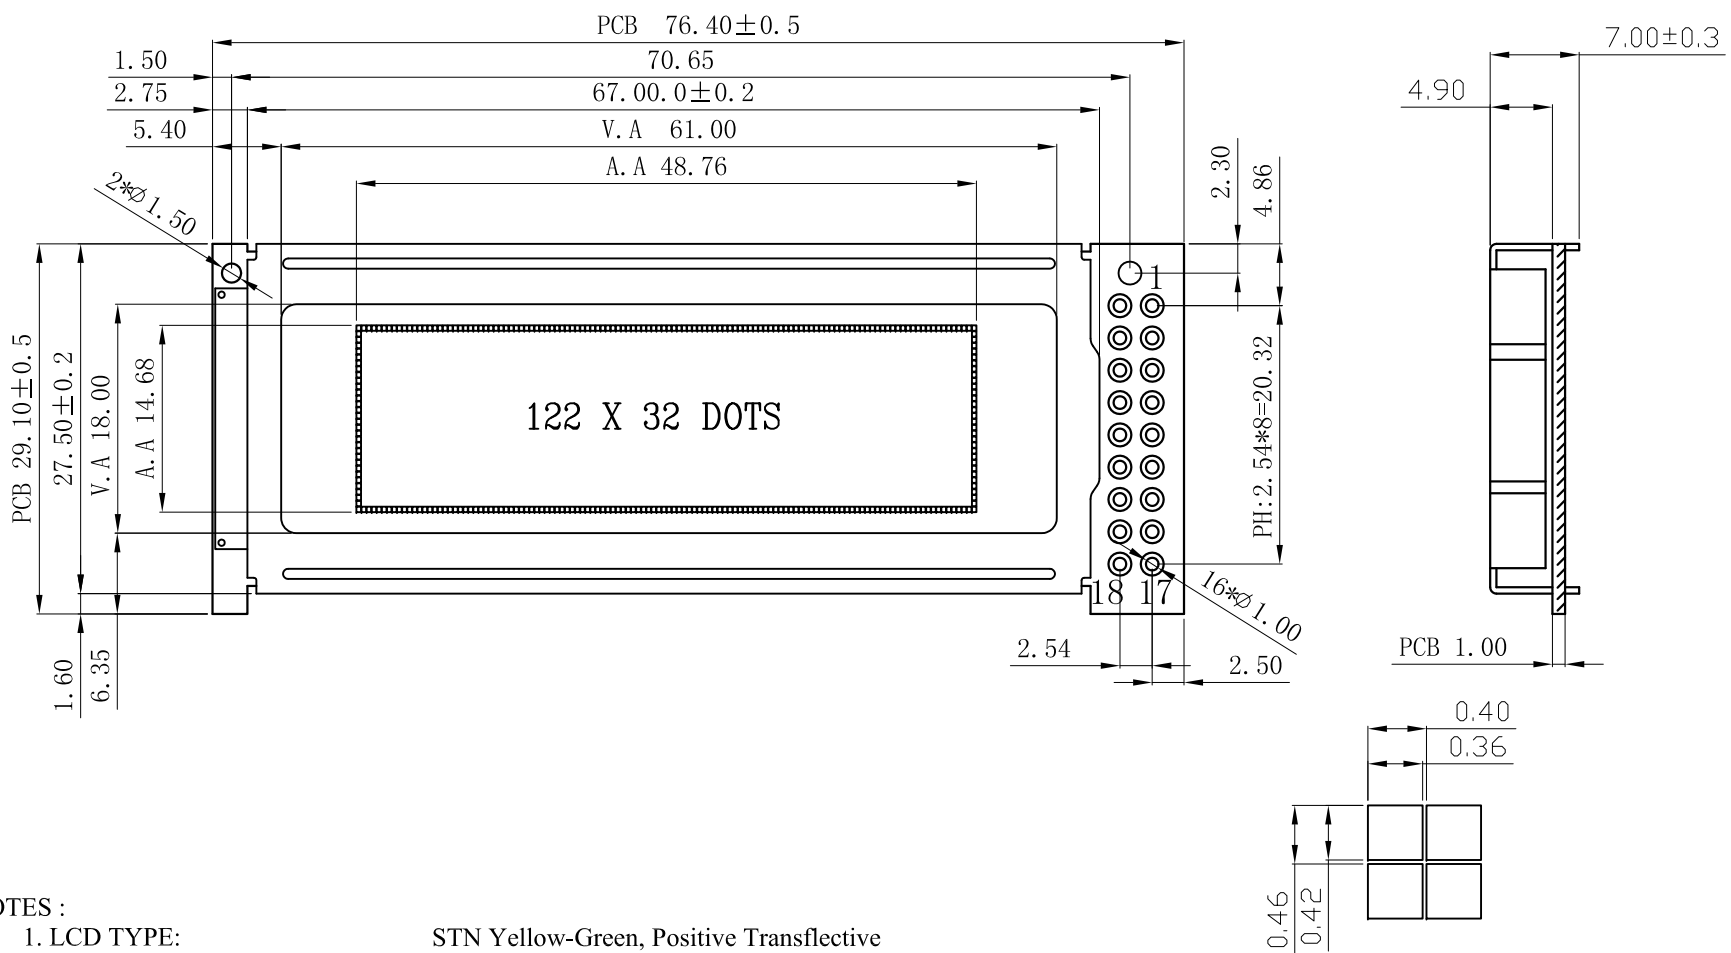


REV:	DESCRIPTION	BY	DATE
V1.0	New issue	Mike	2013-05-16



NO	Symbol
1	VDD
2	VSS
3	V0
4	RST
5	E1
6	E2
7	R/W
8	RS
9	DB0
10	DB1
11	DB2
12	DB3
13	DB4
14	DB5
15	DB6
16	DB7
17	LEDK
18	LEDA

- NOTES :
- | | |
|---|--|
| 1. LCD TYPE: | STN Yellow-Green, Positive Transflective |
| 2. OPERATING VOLTAGE: | VDD=5.0V, Vop=5.0V |
| 3. VIEWING DIRECTION: | 6 O'CLOCK |
| 4. DRIVE METHOD: | 1/32 Duty, 1/5 Bias |
| 5. OPERATING TEMP: | -20°C TO +70°C |
| 6. STORAGE TEMP: | -30°C TO +80°C |
| 7. CONNECTOR TAPE: | Zebra |
| 8. DRIVER IC: | SBN1661 or Equivalent |
| 9. BACKLIGHT: | Yellow-Green |
| 10. ALL sub-parts and materials of the parts, must comply with the RoHS instructions of EU. | |

		SINDA DISPLAY TECHNOLOGY CO., LTD.	
SHEET: 1 of 1		MODEL NUMBER : SDGB12232-03	VERSION: 1.0 GENERAL TOL: ± 0.2 DO NOT SCALE THIS DRAWING.
APPROVALS	DATE	UNITS: MM	
DWN Mike	2013-05-16	SCALE: 1:1	
CHK			
APP CJ	2013-05-16		
www.sindadisplay.com			