

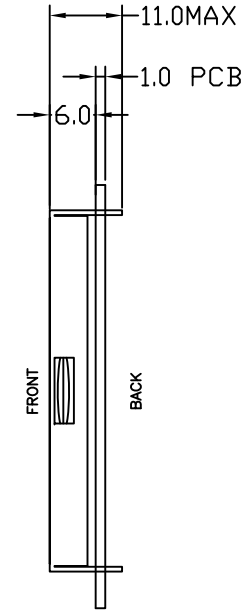



REV:	DESCRIPTION	BY	DATE
V1.0	New issue	Mike	2017-01-03

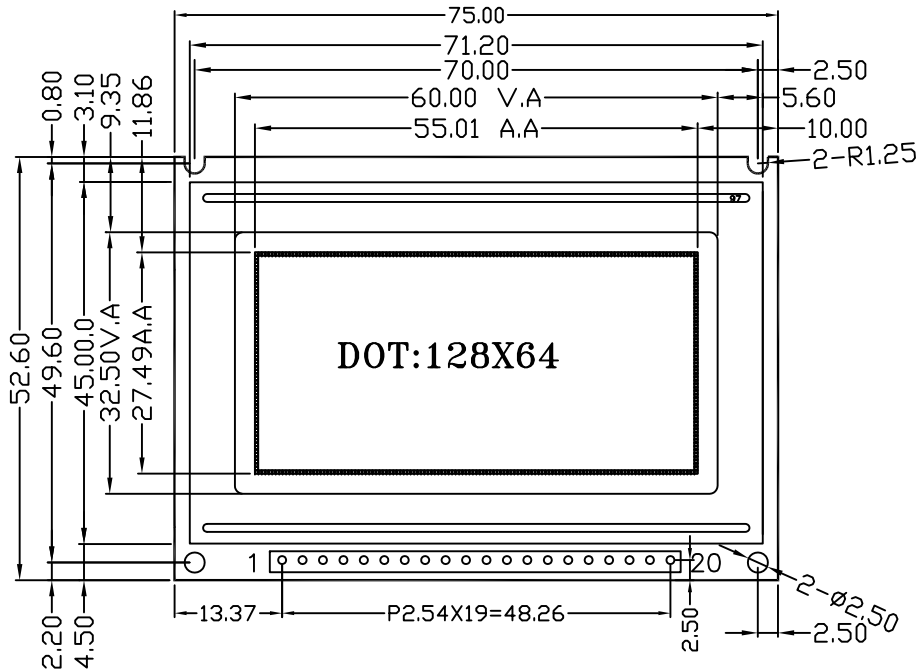

NO	Symbol
1	VDD
2	VSS
3	V0
4	DB0
5	DB1
6	DB2
7	DB3
8	DB4
9	DB5
10	DB6
11	DB7
12	CS1
13	CS2
14	RST
15	RW
16	RS
17	E
18	VEE
19	LEDA
20	LEDK

NOTES :

- | | |
|---|-----------------------------|
| 1. LCD TYPE: | FSTN, Positive Transfletive |
| 2. OPERATING VOLTAGE: | VDD=5.0V, Vop=9.0V |
| 3. VIEWING DIRECTION: | 6 O'CLOCK |
| 4. DRIVE METHOD: | 1/64 Duty, 1/9 Bias |
| 5. OPERATING TEMP: | -20°C TO +70°C |
| 6. STORAGE TEMP: | -30°C TO +80°C |
| 7. CONNECTOR TAPE: | Zebra |
| 8. DRIVER IC: | AIP31107 or Equivalent |
| 9. BACKLIGHT: | White |
| 10. ALL sub-parts and materials of the parts, must comply with the RoHS instructions of EU. | |



SINDA SINDA DISPLAY TECHNOLOGY CO., LTD.

SHEET: 1 of 1		
APPROVALS		DATE
DWN	Mike	2017-01-03
CHK		
APP	CJ	2013-01-03

MODEL NUMBER :	VERSION: 1.0	UNITS:
SDGB12864-08	GENERAL TOL: ± 0.2	MM
DO NOT SCALE THIS DRAWING.		
www.sindadisplay.com		SCALE: 1:1