

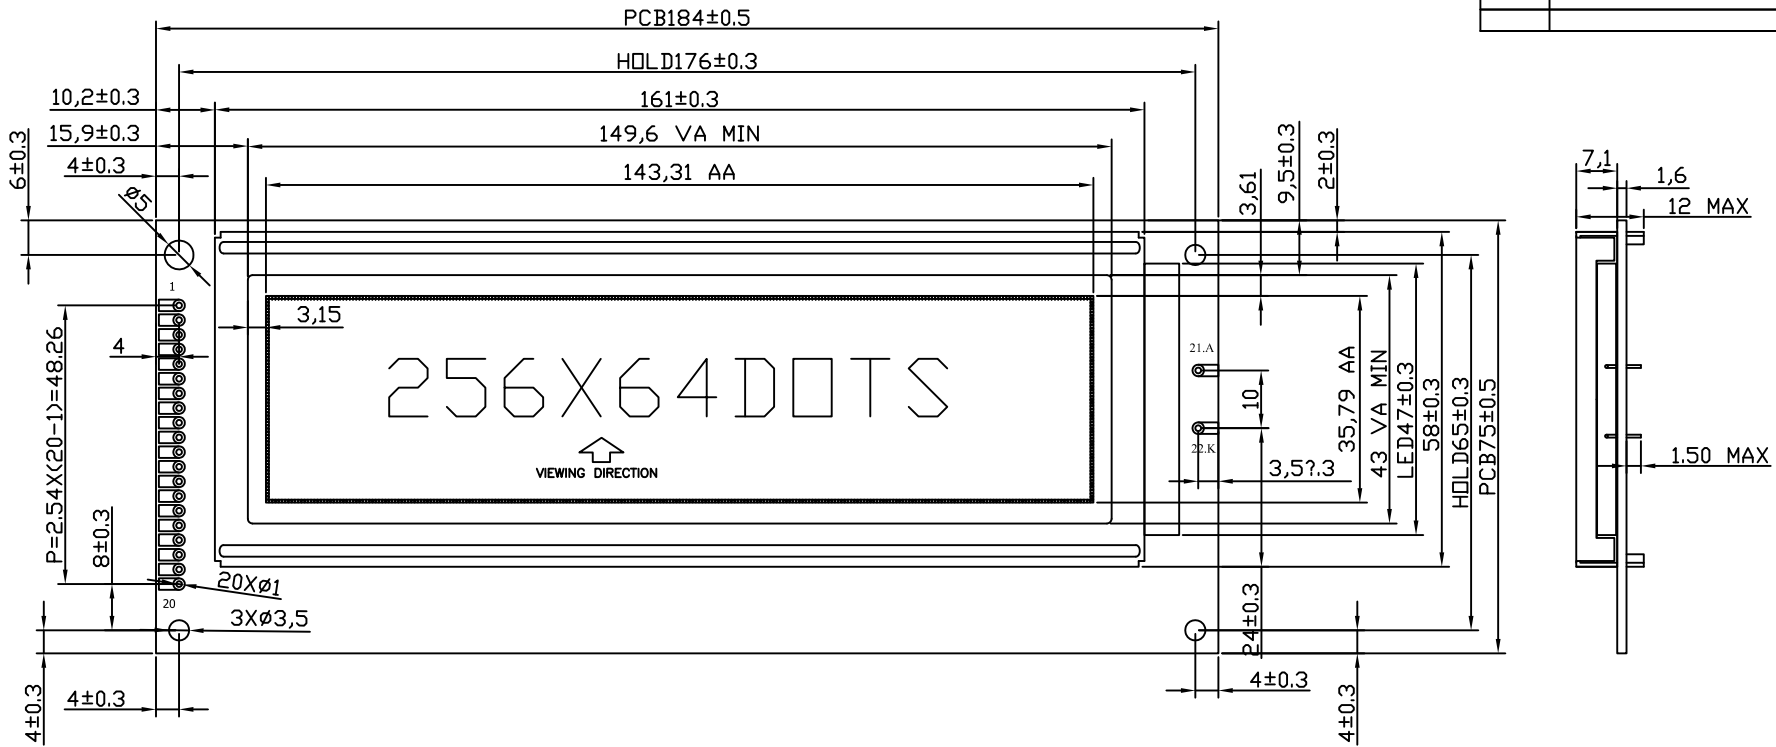


REV:	DESCRIPTION	BY	DATE
V1.0	New issue		2013-06-19



INTERFACE	
1	FG
2	VSS
3	VDD(5V)
4	VEE
5	/WR
6	/RD
7	/CE
8	C/D
9	V0
10	/RST
11	DB0
12	DB1
13	DB2
14	DB3
15	DB4
16	DB5
17	DB6
18	DB7
19	FS
20	RV
21	LEDA(5V)
22	LEDK

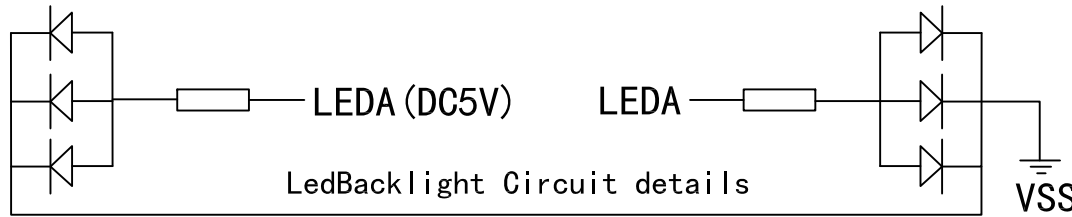

NOTES :

- | | |
|---|---------------------------------|
| 1. LCD TYPE: | STN-Blue, Negative Transmissive |
| 2. OPERATING VOLTAGE: | VDD=5.0V, Vop=13.5V |
| 3. VIEWING DIRECTION: | 6 O'CLOCK |
| 4. DRIVE METHOD: | 1/64 Duty, 1/19 Bias |
| 5. OPERATING TEMP: | -20°C TO +70°C |
| 6. STORAGE TEMP: | -30°C TO +80°C |
| 7. CONNECTOR TAPE: | Zebra |
| 8. DRIVER IC: | RA6963 or Equivalent |
| 9. BACKLIGHT: | White |
| 10. ALL sub-parts and materials of the parts, must comply with the RoHS instructions of EU. | |

SHEET: 1 of 1		
APPROVALS	DATE	
DWN	SD-05	2013-06-19
CHK		
APP	SD-11	2013-06-19

SINDA DISPLAY TECHNOLOGY CO., LTD.

MODEL NUMBER :	VERSION: 1.0	UNITS:
SDGB25664-02	GENERAL TOL: ± 0.2	MM
DO NOT SCALE THIS DRAWING.		

www.sindadisplay.com

SCALE: 1:1