

8

7

6

5




4

3

2

1


REV:	DESCRIPTION	BY	DATE
V1.0	New issue		2016-07-08
V2.0			

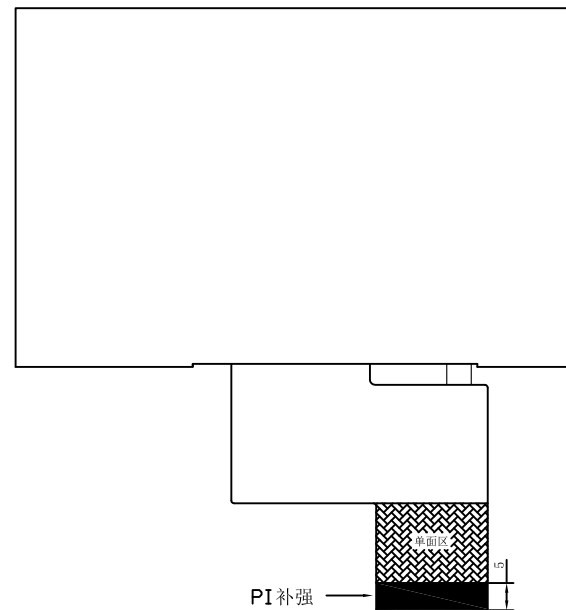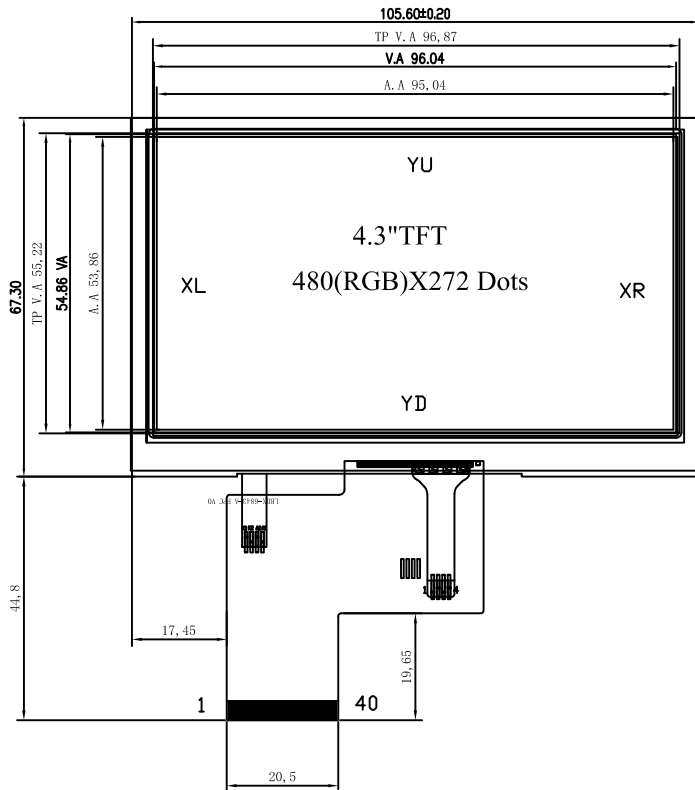

1	LEDK
2	LEDA
3	GND
4	VCC
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	CLK
31	DISP
32	HSYNC
33	YSYNC
34	DEN
35	NC
36	GND
37	XR
38	YD
39	XL
40	YU

Display Type	TFT NEGATIVE TRANSMISSIVE
Viewing Angle	120°CLOCK
Operation Temperature	-20°C TO +70°C
Storage Temperature	-30°C TO +80°C
Interface	RGB
Backlight Color	WHITE
Drive IC	OTA5180
All radii without dimension	
Unspecified tolerance is	±0.2
ROHS request	Yes

ITEM	ELECTRICAL & PHYSICAL DATA
LED	pcs
Luminous	cd/m (MIN .Avg)
Uniformity	80%(TYP)
C.I.E	X 0.260~0.315
	Y 0.260~0.315
Supply Current	mA(fixed)
Supply Voltage	3.2V



SINDA DISPLAY TECHNOLOGY CO., LTD.

MODEL NUMBER : **SDT04302T-40**

VERSION: 2.0

UNITS: MM

GENERAL TOL: ± 0.2

DO NOT SCALE THIS DRAWING.

SHEET: 1 of 1

APPROVALS	DATE
DWN SD-03	2016-07-23
CHK	
APP SD-11	2016-07-23

www.sindadisplay.com

SCALE: 1:1

8

7

6

5

4

3

2

1