

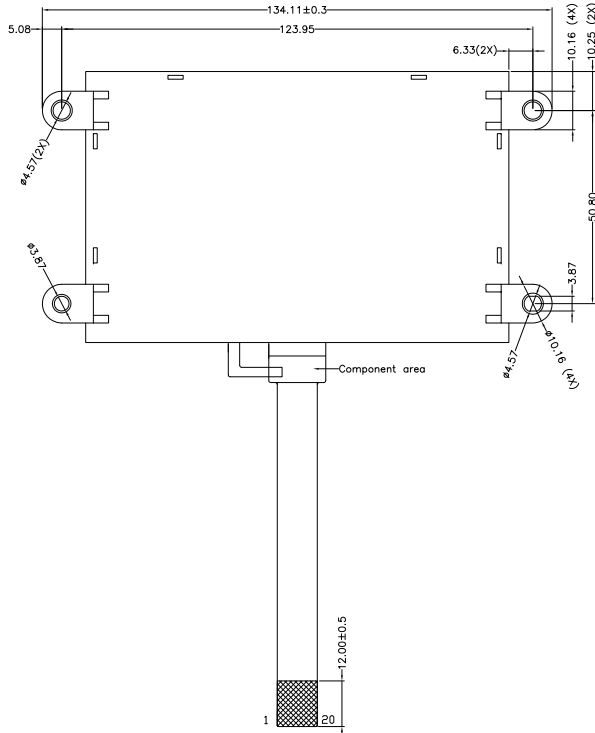
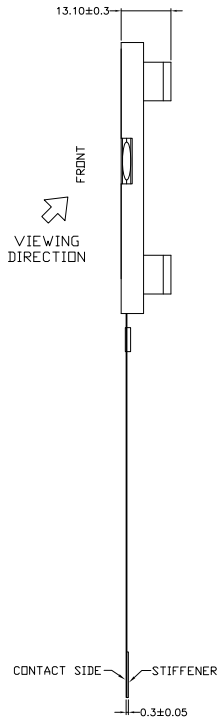
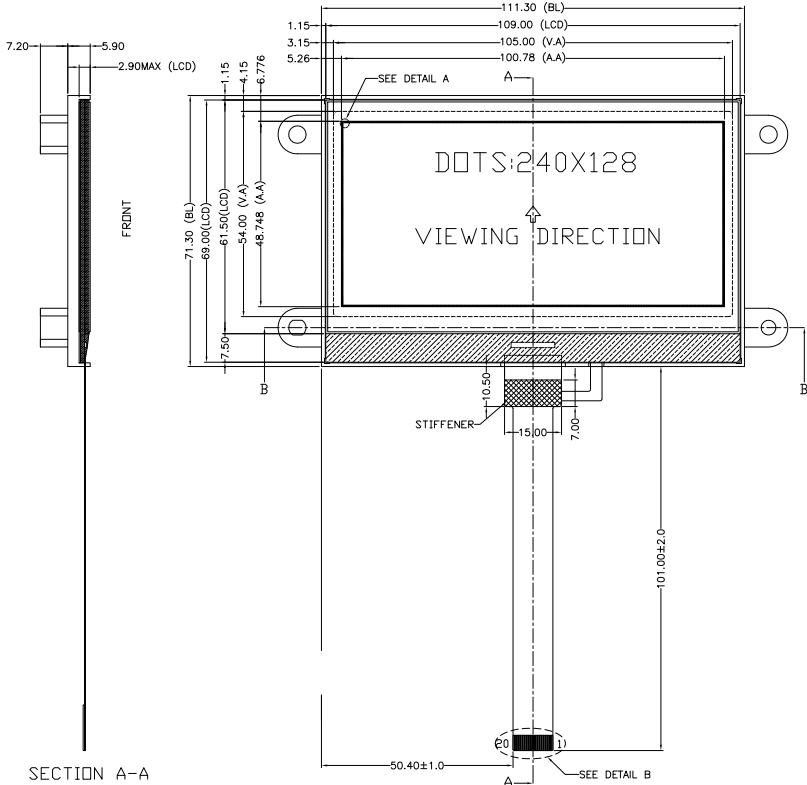




REV:	DESCRIPTION	BY	DATE
V1.0	New issue	SD-04	2019-05-13




PIN	SYMBOL
1	VSS
2	LED+
3	LED−
4	BM1
5	BM0
6	CS
7	RESET
8	CD
9	WR
10	RD
11	DB0
12	DB1
13	DB2
14	DB3
15	DB4
16	DB5
17	DB6
18	DB7
19	VDD
20	VSS

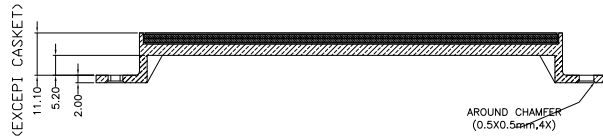


NOTES :

- | | |
|---|---|
| 1. LCD TYPE: | FSTN, Positive Transflective |
| 2. OPERATING VOLTAGE: | VDD=3.0V,Vop=13.6V |
| 3. VIEWING DIRECTION: | 6 O'CLOCK |
| 4. DRIVE METHOD: | 1/128 Duty,1/12 Bias |
| 5. OPERATING TEMP: | -30°C TO +80°C |
| 6. STORAGE TEMP: | -40°C TO +85°C |
| 7. CONNECTOR TAPE: | COG+FPC |
| 8. DRIVER IC: | UC1608X or Equivalent |
| 9. BACKLIGHT: | 6 pcs LED White,VF=16.8~19.2V,IF=15mA |
| 10. ALL sub-parts and materials of the parts, | must comply with the RoHS instructions of EU. |



BACKLIGHT SCHEMATIC
(CONSTANT CURRENT)



SHEET: 1 of 1

APPROVALS	DATE
-----------	------

DWN	SD-04	2019-05-13
-----	-------	------------

CHK		
-----	--	--



SINDA DISPLAY TECHNOLOGY CO., LTD.

MODEL NUMBER :
SDGG240128-01

VERSION:	1.0	UNITS:
----------	-----	--------

GENERAL TOL:± 0.2	MM
-------------------	----

DO NOT SCALE THIS DRAWING.

www.sindadisplay.com

SCALE: 1:1