


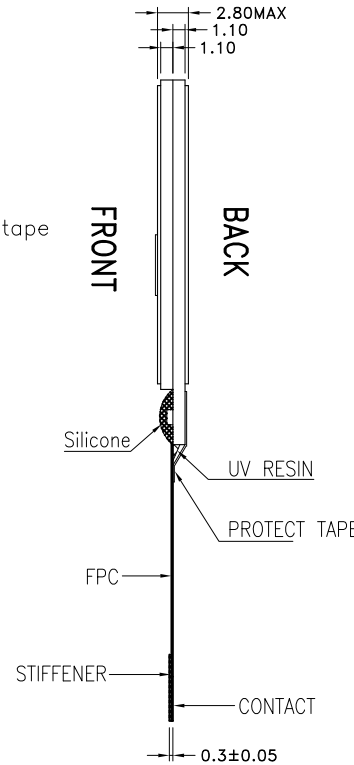


REV:	DESCRIPTION	BY	DATE
V1.0	New issue		2018-06-24

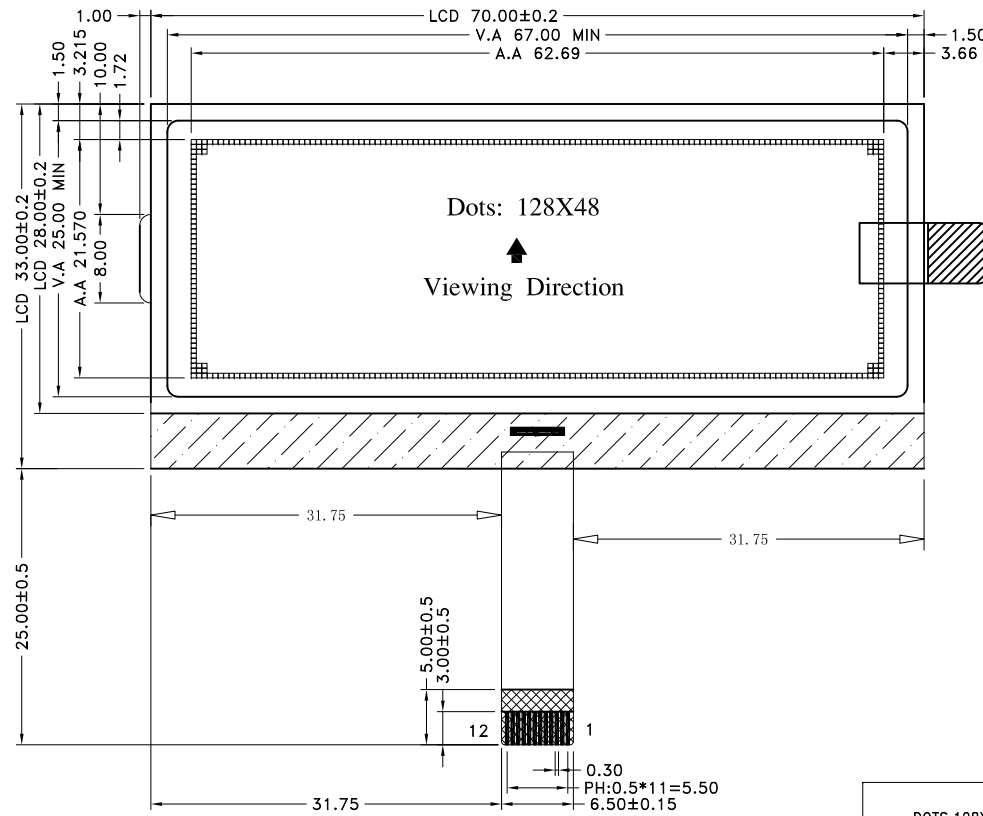


PIN	SYMBOL
1	CSB
2	/RES
3	CD
4	D6(SCL)
5	D7(SDA)
6	VDD
7	VSS
8	VB0+
9	VB0-
10	VB1-
11	VB1+
12	VLCD

NOTES :

- LCD TYPE: FSTN, Positive Transmissive
- OPERATING VOLTAGE: VDD=3.0V, Vop=8.5V
- VIEWING DIRECTION: 6 O'CLOCK
- DRIVE METHOD: 1/49 Duty, 1/9 Bias
- OPERATING TEMP: -10°C TO +60°C
- STORAGE TEMP: -20°C TO +70°C
- CONNECTOR TAPE: COG+FPC
- DRIVER IC: UC1701XGAA or Equivalent
- BACKLIGHT: NO
- ALL sub-parts and materials of the parts, must comply with the RoHS instructions of EU.

COM & SEG LAYOUT

DOTS DETAIL



SHEET: 1 of 1		
APPROVALS		DATE
DWN	SD-06	2018-06-24
CHK		
APP	SD-11	2018-06-24

MODEL NUMBER :	VERSION: 1.0	UNITS:
SDGG12848-05	GENERAL TOL: ± 0.2	MM
DO NOT SCALE THIS DRAWING.		
www.sindadisplay.com		SCALE: 1:1