

8

7

6

5

4

3

2

1

REV:	DESCRIPTION	BY	DATE
V1.0	NEW	SD-03	

D

D

C




C

B

B

A

A

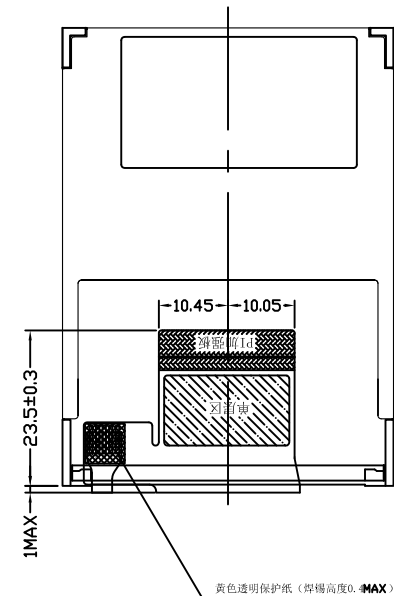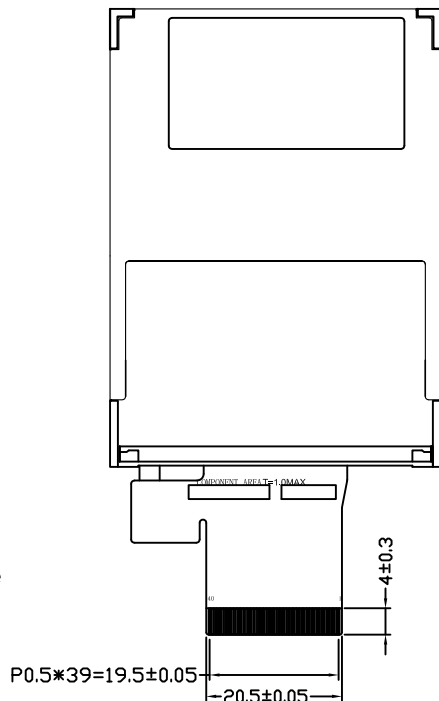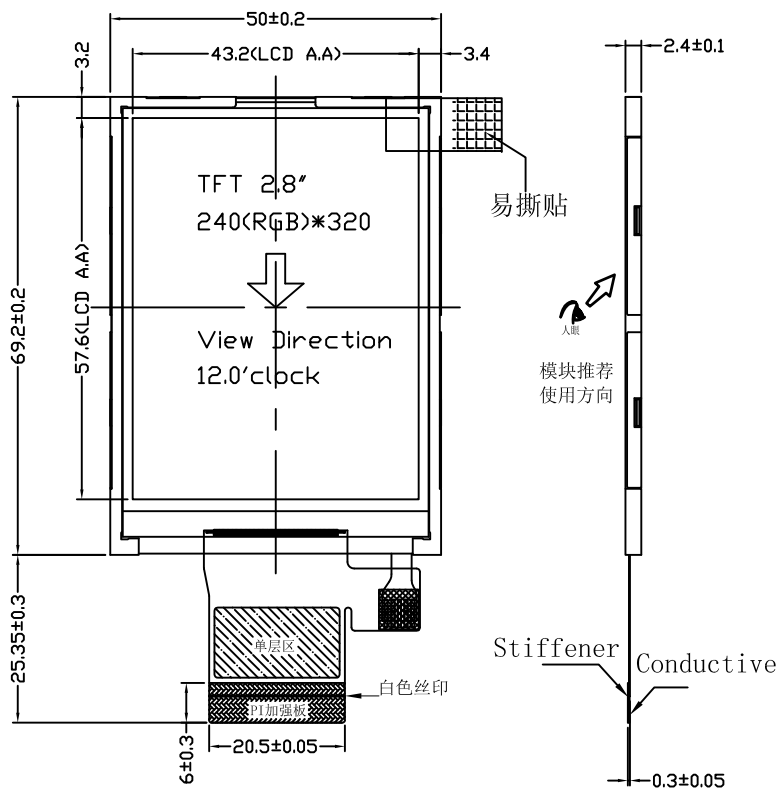



FPC折弯后示图  
展开出货

NO.	PIN NAME
1	GND
2	YD
3	XL
4	YU
5	XR
6	DB17
7	DB16
8	DB15
9	DB14
10	DB13
11	DB12
12	DB11
13	DB10
14	DB8
15	DB7
16	DB6
17	DB5
18	DB4
19	DB3
20	DB2
21	DB1
22	RESET
23	SD0
24	SD1/SDA
25	RD
26	WR(D/CX)
27	D/CX(SC)
28	CS
29	IOVCC
30	VCC
31	GND
32	IM3
33	IM2
34	IM1
35	DM0
36	LEDA
37	LEDK1
38	LEDK2
39	LEDK3
40	NC

NOTES:

- 1.DISPLAY TYPE:TFT TRANSMISSIVE
- 2.VIEWING DIRECTION:12 O'CLOCK
- 2.OPERATING TEMP: -20°~70°
- 3.STORAGE TEMP: -30°~80°
- 4.DRIVER IC: COG ILI9341V
- 5.BACK LIGHT: 4 CHIP WHITE LED (Parallel)



 <b>SINDA DISPLAY TECHNOLOGY CO., LTD.</b>				
SHEET: 1 of 1		MODEL NUMBER : <b>SDT02802N-40</b>	VERSION: 1.0	UNITS: MM
APPROVALS	DATE	GENERAL TOL:± 0.2		
DWN	SD-03	DO NOT SCALE THIS DRAWING.		
CHK				
APP	SD-11			
		www.sindadisplay.com		SCALE: 1:1

8

7

6

5

4

3

2

1