

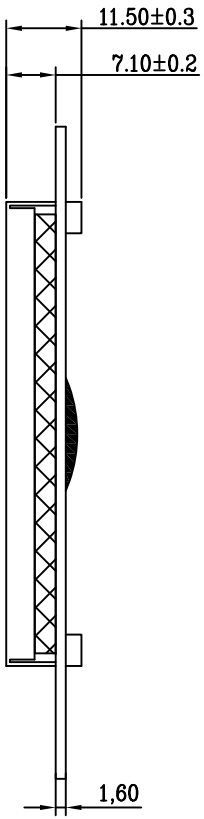


REV:	DESCRIPTION	BY	DATE
V1.0	New issue	CJ	2017-10-13

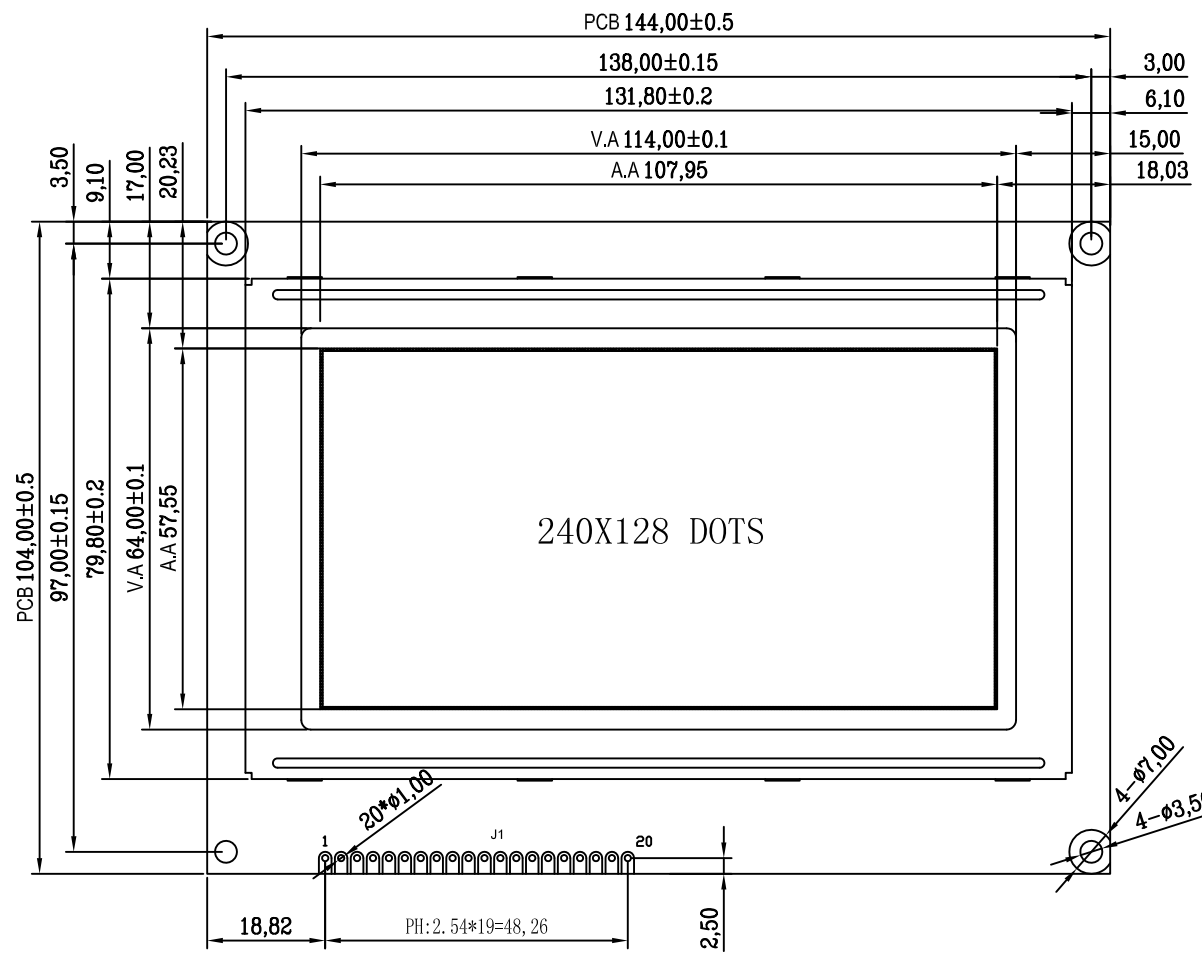

NO	Symbol
1	FG
2	VSS
3	VCC(5V)
4	V0
5	/WR
6	/RD
7	/CE
8	C/D
9	/RST
10	DB0
11	DB1
12	DB2
13	DB3
14	DB4
15	DB5
16	DB6
17	DB7
18	FS
19	LEDA
20	VEE

- NOTES:
- 01. DISPLAY TYPE: STN(BLUE)/NEGATIVE/TRANSMISSIVE
  - 02. OPERATING VOLTAGE: VOP= 18.0V,VDD=5.0V
  - 03. OPERATING TEMPERATURE: -20°C~+70°C
  - 04. STORAGE TEMPERATURE: -30°C~+80°C
  - 05. DRIVE MODE: 1/128DUTY,1/12BIAS
  - 06. VIEWING DIRECTION: 6:00
  - 07. DRIVE IC: RA6963
  - 08. CONNECTOR: ZEBER
  - 09. BACKLIGHT: WHITE

		<b>SINDA DISPLAY TECHNOLOGY CO., LTD.</b>	
SHEET: 1 of 1		MODEL NUMBER : SDGB240128-05	VERSION: 1.0
APPROVALS	DATE	GENERAL TOL:± 0.2	
DWN CJ	2017-10-13	UNITS: MM	
CHK		DO NOT SCALE THIS DRAWING.	
APP Mike	2017-10-13	www.sindadisplay.com	
		SCALE: 1:1	