
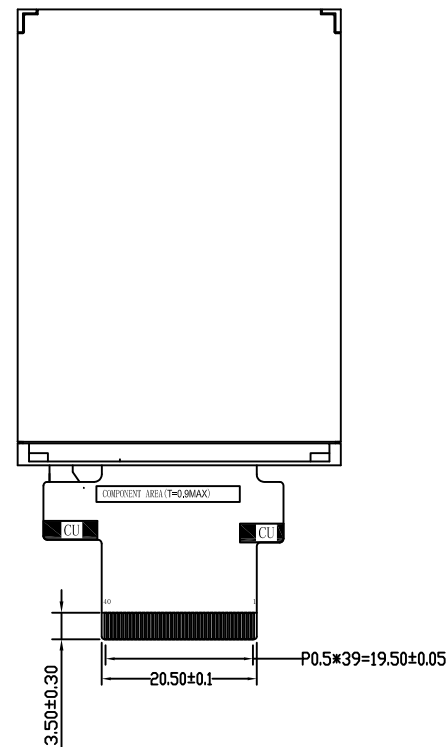
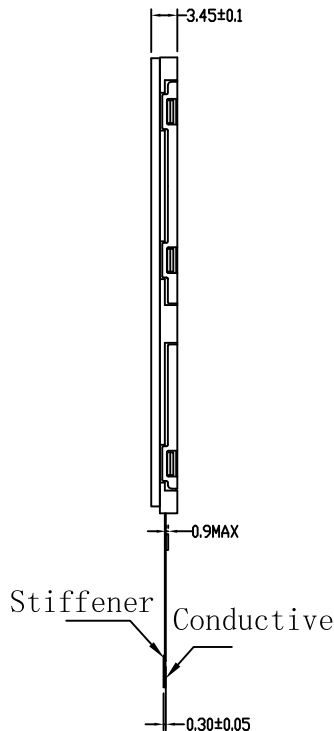


REV:	DESCRIPTION	BY	DATE
V1.0	NEW	SD-03	

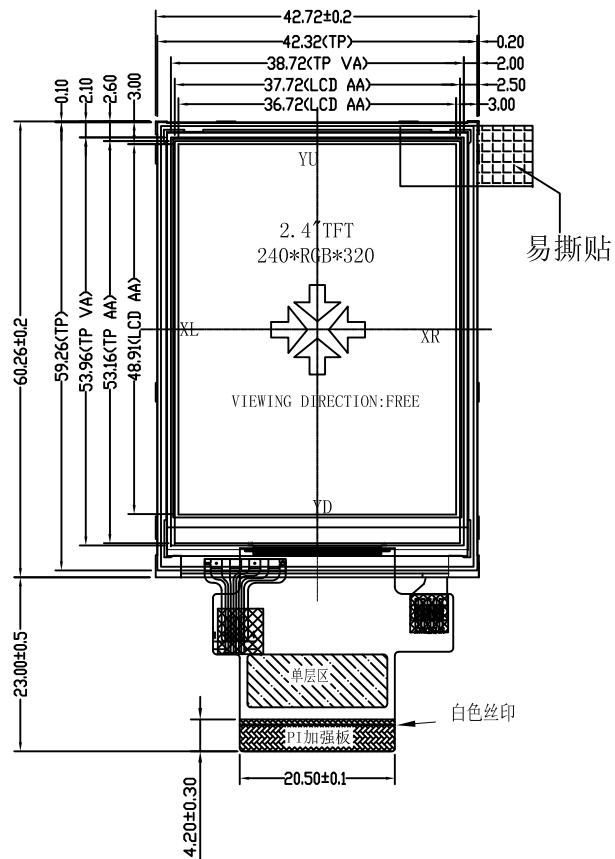


NO.	PIN NAME
1	LEDK
2	LEDA
3	GND
4	VCI
5	RESET
6	RS-SCL
7	RD
8	CS
9	SDA
10	WR_D/C
11	VSYNC
12	HSYNC
13	DOTCLK
14	DE
15	GND
16	DB17
17	DB16
18	DB15
19	DB14
20	DB13
21	DB12
22	DB11
23	DB10
24	DB9
25	DB8
26	DB7
27	DB6
28	DB5
29	DB4
30	DB3
31	DB2
32	DB1
33	DB0
34	TE
35	GND
36	IOVCC
37	XR
38	YD
39	XL
40	YU


FPC
展开出货

NOTES:

- 1.DISPLAY TYPE: TFT-LCD, TRANSMISSIVE
- 2.VIEWING DIRECTION: ALL O'CLOCK
- 2.OPERATING TEMP: -20°~70°
- 3.STORAGE TEMP: -30°~80°
- 4.DRIVER IC: COG ST7789V2
- 5.BACK LIGHT: 4 CHIP WHITE LED (Parallel)

LED CIRCUIT DIAGRAM:



 SINDA DISPLAY TECHNOLOGY CO., LTD.				
SHEET: 1 of 1		MODEL NUMBER : SDT02404-A40	VERSION: 1.0	UNITS: MM
APPROVALS	DATE	GENERAL TOL: ± 0.2		
DWN	SD-03	DO NOT SCALE THIS DRAWING.		
CHK				
APP	SD-11			
		www.sindadisplay.com		SCALE: 1:1